




PAR-P3DRIR3312 3 Megapixel IP Plug & Play Outdoor Rugged Dome, 3.3-12mm, 98' IR Range, PoE/DC12V, CVBS Output, SD Card Slot

3 Megapixel Plug & Play	H.265	True Day/Night
True WDR	IR 98' Range	CVBS Output
TF Card Slot	Audio In/Out	IP66 Weather Resistant
IK10 Vandal Resistant	PoE/DC12V	Free App iOS & Android
FREE CMS	Free MAC Client Through NVR	

Features

- 3 Megapixel (2304 x 1296) Resolution
- H.265/H.264/MJPEG Compression
- True Day/Night
- True WDR 120dB
- IR Range up to 98'
- CVBS Video Output
- TF Card Local Storage, 128GB
- Audio Input/Output
- IP66 Weather Resistant
- IK10 Vandal Resistant
- 12VDC/PoE
- Free iOS & Android Apps for Smart Phones & Tablets
- Free Central Management Software (CMS) to manage multiple units & sites from a single platform
- Free MAC client software available, through the Paramont NVR, to manage your system from your Apple computer

Mounting Options

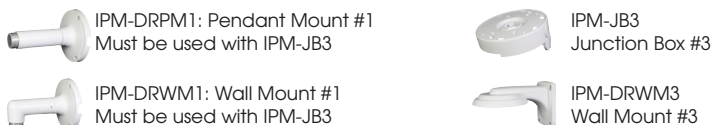

Ordering Information

PAR-P3DRIR3312: 3 Megapixel Bullet, 3.3-12mm

Camera	
Image Sensor	1/3" CMOS
Image Size	2304 x 1296
Electronic Shutter	1/25s ~ 1/10000s
Auto Iris	Fixed Iris
Min Illumination	0.05 Lux @ F1.2, AGC On; 0 Lux with IR
Lens	3.3~12mm @ F1.4 Angle of View: 80° ~38°
Lens Mount	Ø14
True Day/Night	ICR
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Defogging	Yes
Digital NR	2D/3D DNR
Angle Adjustment	Pan: 0°~360°, Tilt: 0°~77°, Rotation: 0°~360°
Image	
Video Compression	H.265/H.264/MJPEG
H.265 Compression Standard	Main Profile @ Level 4.1 High Tier
Resolution	3 MP (2304 x 1296), 3 MP (2048 x 1536), 1080p (1920x1080), 720p (1280x720), D1, CIF, 480x240
Main Stream	60Hz/30 FPS: 3 MP, 1080p, 720p 50Hz/25 FPS: 3MP, 1080p, 720p
Bit Rate	64 Kbps ~ 8 Mbps
Encode Mode	VBR/CBR
Quality	Five Levels Under VBR; Freely adjustable under CBR
Image Settings	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR: Adjustable through client software or web browser
Audio Compression	G.711A/U
ROI	Each ROI to be configured separately
Interfaces	
Network	RJ45
Audio	MIC-In x1, MIC-Out x1
Video Output	CVBS Video Output (BNC x 1)
Storage Card	Support TF Card, Up to 128GB
RS485	Yes
Alarm Input	1 Channel
Alarm Output	1 Channel
Functions	
Remote Monitoring	IE Browsing, CMS Remote Control
Online Connection	Supports simultaneous monitoring for up to 10-users; Support multi-stream real-time transmission
Network Protocol	TCP/IP, UDP, DHCP, UPnP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Interface Protocol	ONVIF, GB-T/28181-2011
Storage	TF Card Local Storage, Network Remote Storage
Smart Alarm	Motion Alarm, Sensor Alarm
PoE	Yes
IR Distance	98 Feet
Environmental	IP66 Weather Resistant
Housing	IK10 Vandal Resistant
Other	
Power Supply	DC12V/PoE
Power Consumption	<2.5W
IR Consumption	<5W
Operating Environment	-4° ~ 122°F (-20° ~ 50°C), 10-90% Humidity
Dimensions	Ø 5.9 x 4.48 Inches (150x114mm)
Weight	2.27lbs (1030g)

3 MEGAPIXEL PLUG & PLAY