



ELECTRONIC GROUP, INC

480-635-8400 p * aegis-g2@aegiselect.com

<http://www.aegis-elec.com>



VMTR-8.4V

8.4" Touch Screen LCD Monitor

- 5-Wire Resistive Touch Screen
- Resolution: 800 x 600
- Aspect Ratio: 4:3
- Rugged, Powder-Coated Steel Housing
- **TRU-Tuff** Ensures Maximum Shock & Vibration Resistance
- Can Be Customized To Meet Your Needs
- 3 Year Warranty

The VM-8.4 Series LCD monitors offer exceptional image quality and dependable 24/7/365 operation. This monitor is ideally suited wherever you need detailed, high quality images in a rugged metal enclosure. The VM-8.4 Series monitors have been successfully used with machine vision systems, in police cars, public transportation, manufacturing plants and studios. They can also be private-labelled with your company, name, logo and model number.

All TRU-Vu industrial LCD monitors are specifically designed for use in demanding industrial, commercial, law enforcement, and A/V applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Visit www.TRU-VuMonitors.com for more details.


Specifications

MODEL	VMTR-8.4V
LCD Panel	8.4" LED Backlight LCD
Touch Screen Type	5-Wire Resistive Touch
Touch Interface	USB
Resolution	800 x 600 (SVGA)
Display Area	6.70" x 5.03" / 170.4 x 127.8 mm
Pixel Pitch	0.231 mm
Display Colors	16.2m
Aspect Ratio	4:3
Brightness	450 nits
Contrast Ratio	700:1
Viewing Angle	160° (H) x 140° (V)
Response Time	30 msec
Control	OSD (On-Screen Display) via Rear Panel Pushbuttons
Video Input	VGA
Power Requirement	12 VDC (90-250 VAC with included power adapter)
Power Consumption	800 mA
Enclosure	Powder-Coated Steel
Mounting	75 X 75 mm VESA
Operating Temperature	-31° to +185° F / -35° to +85° C
Dimensions	8.7" (W) x 6.3" (H) x 1.6" (D) / 220.97 (W) x 160.01 (H) x 40.64 (D) mm
Weight	2.8 lbs. / 1.3 kg

VMTR-8.4V

8.4" Touch Screen LCD Monitor

Dimensions:

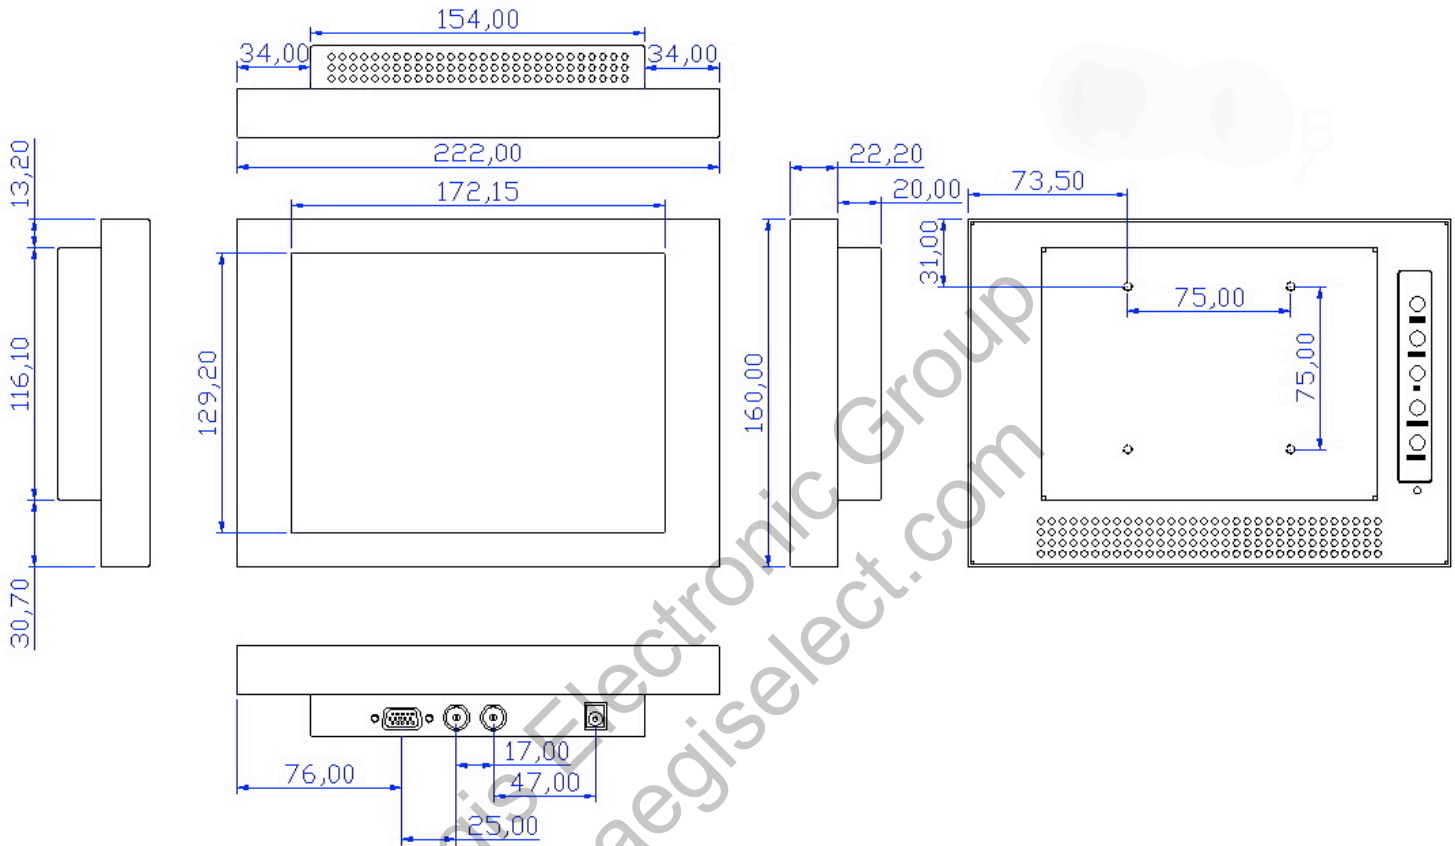

Standard Accessories:

- 90-240 VAC Power Adapter

Available Options:

- Move OSD Control Buttons onto Front Bezel
- DVI Video Input
- 18-28 VDC Operation
- Panel Mount
- Rack Mount
- Open-Frame Configuration
- Private Label
- Wall Mount or Tabletop Bracket
- Other Customer - Specific Modifications