

# PixelINK<sup>®</sup>

A NAVITAR COMPANY

## PL-D755

CMOS | SONY IMX250 | GLOBAL SHUTTER

The PL-D family of cameras links together the benefits of high frame rate CMOS technology with the high speed data throughput of USB 3.0 technology. The PL-D755 camera provides low noise images for outstanding value in a broad range of industrial applications.



### KEY FEATURES

5.01MP

CMOS



75  
FRAMES  
Per Sec



3.45  $\mu$ m



11.1 mm



12 BIT



COLOR



MONO



USB 3

### TYPICAL APPLICATIONS

Parts Inspection  
Strength Testing  
Metrology

Biometrics  
Medical Imaging  
PCB & Flat Panel Display Inspection

## DESCRIPTION

The PL-D family of USB 3.0 cameras links together the benefits of high frame rate CMOS technology with the high speed data throughput of USB 3.0 technology. The PL-D755 camera provides low noise images for outstanding value in a broad range of industrial applications. The camera features a 5.01 megapixel (2448 x 2048) resolution imager.

The PL-D755 cameras are based on an Sony IMX250 CMOS global shutter sensor with a 2/3" optical format. The extensive built-in image processing possibilities (image pre-processing) result in outstanding image quality, less load on the system and higher performance. These cameras provide the user choice of 8-bit or 10-bit digitization and have a dynamic range of up to 70db. The external hardware trigger and 2 general-purpose outputs ensure users have the flexibility to synchronize the camera with their processes and illumination.

PixeLINK's industry leading SDK uses a common API for all cameras regardless of the chosen interface. Software code developed for one camera is easily transferred to other PixeLINK models without the need to recompile. Overall system costs are reduced and camera integration is simplified.

The flexible Region of Interest (ROI) control allows users to operate at higher frame rates by placing a lower resolution "window" on the imager at any location.

## GENERAL FEATURES

- Great image quality
- Compact size
- One common API for all cameras
- Board level and enclosed models
- Tethered sensor head option 6"/12" (\*Board Level version only)
- Auto & manual exposure
- Programmable LUT
- Auto & Manual White Balance
- Saturation
- Binning and Decimation
- Image Flip & Rotate
- Callbacks (Image Filters)

## SENSOR FEATURES

- 5.01 MP (2448 x 2048) Resolution
- CMOS Global Shutter
- Flexible Region of Interest (64 pixel H x 64 pixel W granularity)
- 8-bit or 12-bit digitization

## SOFTWARE FEATURES

- [PixeLINK Capture Software](#) - a test and configuration software, with real-time, interactive multi-camera application.
- [PixeLINK SDK](#) - providing full access to the PixeLINK API, as well as sample applications with full source code.

## AVAILABLE CONFIGURATIONS

|                   |                      |                    |                      |                    |
|-------------------|----------------------|--------------------|----------------------|--------------------|
| PL-D755CU         | PL-D755CU-BL-AF25    | PL-D755CU-BL-AFE25 | PL-D755MU-AF25       | PL-D755MU-BL-AFE12 |
| PL-D755CU-BL      | PL-D755CU-S-BL-AF2.6 | PL-D755CU-BL-AFE35 | PL-D755MU-BL-AF16    | PL-D755MU-BL-AFE16 |
| PL-D755CU-T       | PL-D755CU-S-BL-AF7.5 | PL-D755MU          | PL-D755MU-BL-AF25    | PL-D755MU-BL-AFE25 |
| PL-D755CU-AF16    | PL-D755CU-S-BL-AF9.6 | PL-D755MU-BL       | PL-D755MU-S-BL-AF2.6 | PL-D755MU-BL-AFE35 |
| PL-D755CU-AF25    | PL-D755CU-BL-AFE12   | PL-D755MU-T        | PL-D755MU-S-BL-AF7.5 |                    |
| PL-D755CU-BL-AF16 | PL-D755CU-BL-AFE16   | PL-D755MU-AF16     | PL-D755MU-S-BL-AF9.6 |                    |

| Color Space         | Interface    | Housing                    | Autofocus                                  |
|---------------------|--------------|----------------------------|--|
| C - Color           | F - Firewire | S-BL - S Mount Board Level | AF - Autofocus lens (in mm)                |
| M - Mono            | G - GigE     | BL - Board Level           | AFE - Edmund Optics Autofocus lens (in mm) |
| NIR - Near Infrared | U - USB      | T - Trigger                |  |
|                     |              | CYL - Cylindrical case     |  |

# TECHNICAL SPECIFICATIONS

## SENSOR

|             |   |
|-------------|---|
| Sensor      | Sony IMX250                             |
| Type        | CMOS Global Shutter                     |
| Resolution  | 5.01 MP (2448 x 2048)                   |
| Pixel Pitch | 3.45 $\mu\text{m}$ x 3.45 $\mu\text{m}$ |
| Active Area | 11.1 mm diagonal                        |
| Peak QE     | 66% @ 525nm                             |

## PERFORMANCE SPECIFICATIONS

|                    |                                       |
|--------------------|---------------------------------------|
| FPN                | 0.03%                                 |
| PRNU               | 0.4                                   |
| Dynamic Range      | 70 dB                                 |
| Bit Depth          | 8 or 10-bit                           |
| Color Data Formats | Bayer 8, Bayer 12 packed and Bayer 16 |
| Mono Data Formats  | Mono 8, Mono 12 packed and Mono 16    |

## MECHANICALS

|                 |                                   |
|-----------------|-----------------------------------|
| Dimensions (mm) | 32 x 48 x 11 (without lens mount) |
| Weight (g)      | 35.8 (without optics)             |
| Mounting        | C-Mount and CS-Mount              |

## INTERFACES

|                               |   |
|-------------------------------|---|
| Interface   Data rate         | USB 3.0   Micro-B   5Gbps                                     |
| Board Level Trigger Connector | 8-pin Molex 1.25mm pitch                                      |
| Enclosed Trigger Connector    | Hirose round 8-pin  |
| Trigger Mode 0                | Software and hardware   |
| Board Level Trigger Input     | 1 input, 3.3V (with internal pullup resistor)                 |
| Enclosed Trigger Input        | 1 optically Isolated, 5-12V DC at 4-11 mA                     |
| Board Level GPO/Strobe        | 2 outputs, 3.3V   |
| Enclosed GPO/Strobe           | 2 outputs, 3.3V and 1 optically isolated max 40V DC, max 15mA |

## FRAME RATE

|             |              |
|-------------|--------------|
| Resolution  | Free Running |
| 2448 x 2048 | 75 fps       |
| 1280 x 1024 | 159 fps      |
| 640 x 480   | 325 fps      |

Frame rates will vary based on host system and configuration  
 \*Above calculations based on fixed frame rate mode

## POWER REQUIREMENTS

|                  |                            |
|------------------|----------------------------|
| Voltage Required | 5V DC (from USB connector) |
|------------------|----------------------------|

## PIO INTERFACE PIN OUTPUT DESCRIPTION

| Pin | Pin Name & Function               |
|-----|-----------------------------------|
| 1   | 3.3V power output                 |
| 2   | TRIGGER, 3.3V HCMOS input         |
| 3   | Ground                            |
| 4   | GPO1, 3.3V HCMOS output           |
| 5   | GPO2, 3.3V HCMOS output           |
| 6   | Clock, 3.3V (12C access for OEMs) |
| 7   | Data, 3.3V (12C access for OEMs)  |
| 8   | No connection                     |

Board connector: Molex 53398-0871 (8-pin, 1.25mm pitch, vertical); Cable receptacle: Molex 51021-0800; Cable crimp terminals: Molex 50079-8100

## ENCLOSED GPIO INTERFACE PIN OUTPUT DESCRIPTION

|   |                                     |
|---|-------------------------------------|
| 1 | VBUS (Power output from USB3 cable) |
| 2 | TRIGGER + (optically isolated)      |
| 3 | TRIGGER - (optically isolated)      |
| 4 | GPO1 + (optically isolated)         |
| 5 | GPO1 - (optically isolated)         |
| 6 | GPO1, 3.3V HCMOS output             |
| 7 | GPO2, 3.3V HCMOS output             |
| 8 | Ground (logic and chassis ground)   |

## SOFTWARE

|                   |   |
|-------------------|---|
| PixelLINK Capture | <a href="#">Test and Configuration Software</a>       |
| DirectShow        | Bundled with PixelLINK Capture                        |
| TWAIN             | Bundled with PixelLINK Capture                        |
| SDK               | <a href="#">API, sample code and LABVIEW wrappers</a> |

## ENVIRONMENTAL & REGULATORY


|                       |                              |
|-----------------------|------------------------------|
| Compliance            | FCC Class B, CE & RoHS       |
| Shock & Vibration     | 300 G & 20 G (10Hz - 2KHz)   |
| Operating Temperature | 0°C to 50°C (non-condensing) |
| Storage Temperature   | -45°C to 85°C                |

## COMPUTER & OPERATING SYSTEM


|                  | Windows            | Linux x86                    | Linux ArmV7          | Linux ArmV8                |
|------------------|--------------------|------------------------------|----------------------|----------------------------|
| Processor        | Intel i5 or better | Intel i5 or better           | Arm7 (32 bit)        | Arm8 (64 bit)              |
| Memory           | 4GB recommended    | 4GB recommended              | 2GB                  | 2GB                        |
| Hard Drive Space | 150 MB             | 150 MB                       | 50 MB                | 50 MB                      |
| Operating System | Windows 7/8/10     | Ubuntu 14.04 / 16.04 Desktop | Ubuntu 14.04 Desktop | Ubuntu 14.04/16.04 Desktop |

# MECHANICAL DRAWINGS & RESPONSIVITY CURVES


## MECHANICAL DRAWINGS

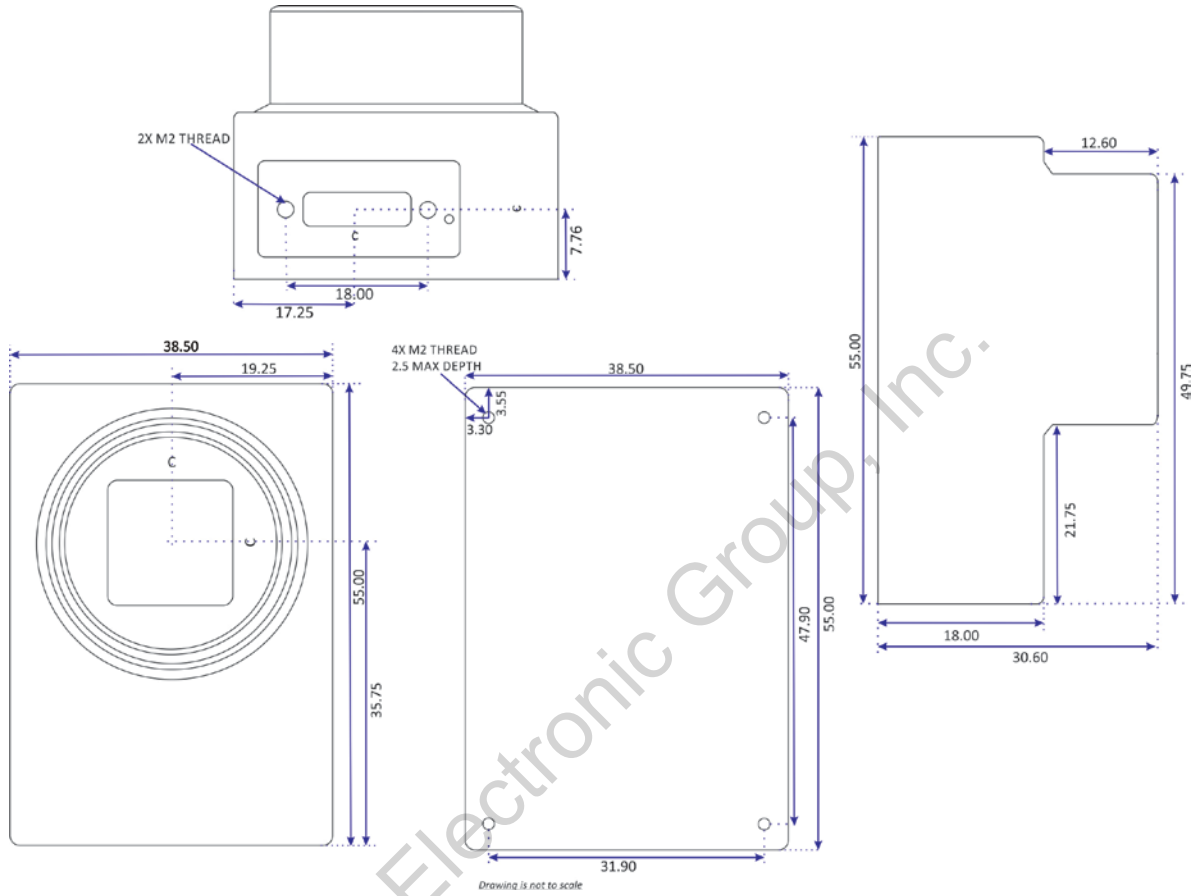

## RESPONSIVITY CURVE – MONO

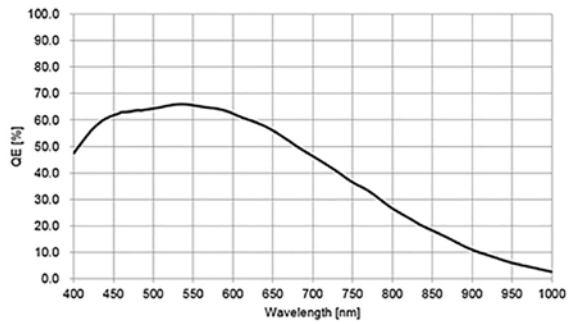

## RESPONSIVITY CURVE – COLOR

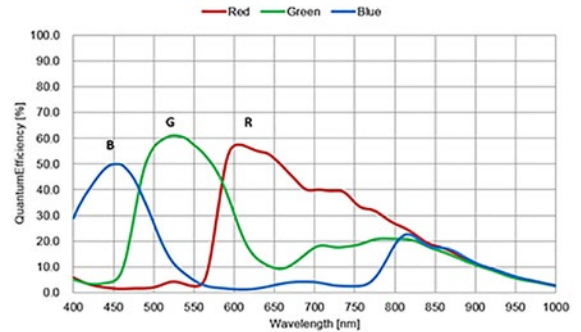

## PixeLINK Capture Software

PixeLINK Capture is a real-time, interactive, multi-camera application. This software is compatible with all PixeLINK's USB 3.0 line of cameras and has been developed using the most advanced software development tools in the market to provide an unmatched multi-camera user experience. [Click here to download the PixeLINK Capture software.](#)

PixeLINK Capture is an advanced application with an agile and friendly user interface. Users now have the ability to drag and drop or arrange windows as they like. As a multi-camera application with a built-in autofocus application, PixeLINK Capture offers tremendous flexibility and power allowing vision engineers the ability to configure and test multi-camera vision applications.

PixeLINK Capture's built-in autofocus application supports both single point and multiple point autofocus. When launched with an autofocus camera, the application takes advantage of the speed of liquid lens technology and displays the time in milliseconds, for each autofocus shot.

For the advanced user, PixeLINK Capture offers options of more complex image enhancements for exposure control, filtering, frame-by-frame property changes, all viewable in the preview window prior to capture.

### SOFTWARE FEATURES

|                      |   |
|----------------------|---|
| Capture Tab          | The "Capture" tab allows the user to capture images in different ways, i.e, one at a time, automated using a "trigger", and elapsed time. The user will also be able to capture images in various file formats like BMP and JPEG.   |
| Effects              | An "Effect" transforms the image's pixel data just prior to display or capture. Typically this function is intended to process an incoming image. The effects tab allows the user to select a pre-defined callback on real-time or captured images.   |
| LUT                  | The Lookup table (LUT) control provides the user an easy way to manipulate the grey scale image data coming from the camera via a simple lookup table.  |
| Layout               | The user will be able to stream multiple cameras with this application. To control cameras together and keep organized under the same window, the software has a user-friendly multiple window layout feature.  |
| Preview              | The preview panel displays live images from the camera which begins streaming immediately when the software is launched. If multiple cameras are connected to the system, then any random camera from the camera tray will start streaming. The preview panel in PixeLINK Capture has been designed with functionalities that allow the user the ability to control a camera directly from the preview panel. |
| Settings             | The settings tab controls the image quality in real-time as seen on the preview window. Controls like exposure, gain, etc. are contained in this tab.   |
| Triggers and GPO Tab | This tab allows the user to control external devices such as triggers and strobes connected to the camera.  |
| Video                | The video tab allows the user the ability to capture and display "video clips" or group of frames (partial or full), save the raw data and further save the formatted clip so that it can be previewed at a later date.   |



# DIGITAL IMAGING MADE SIMPLE

The use of PixelINK machine vision cameras in industrial environments has been proven in numerous applications. Used by both end-users and OEMs, PixelINK offers high quality, reliable off-the-shelf and custom industrial camera solutions to customers around the world.

Only PixelINK can provide you with a custom machine vision camera solution that matches your specific business need. Our custom design services will help you select and integrate the best machine vision camera for your particular application. Contact us today!

PixelINK, a part of the [Navitar](#) family, designs and manufactures reliable industrial cameras and microscope cameras for any machine vision project or microscopy application. Used by both OEM and end-user customers, our custom and off-the-shelf cameras are used in imaging projects around the world.

At PixelINK, we combine reliable industrial camera hardware with industry-leading software to offer unmatched off-the-shelf, OEM and industrial imaging solutions to customers.

PixelINK U.S.A.  
200 Commerce Drive  
Rochester, NY 14623, U.S.A.

PixelINK Canada  
1900 City Park Drive, Suite 410  
Ottawa, Ontario K1J 1A3, Canada