



**ELECTRONIC GROUP, INC**  
 480-635-8400 p \* aegis-g2@aegiselect.com  
 http://www.aegis-elec.com

## SRMH-15-AR Series 15" Sunlight Readable Monitors



- Produces Clear, Sharp Images Even in Direct Bright Sunlight
- 1,700 nits Brightness
- Anti-Reflective Coating
- LED Backlights
- High Shock & Vibration Resistance
- Lockable On-Screen Display Controls
- Dim-to-Black Function Via Front Pushbuttons
- 3 Year Warranty

The SRMH-15-AR Series Sunlight Readable LCD monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. They utilize state-of-the-art LED backlights to produce over 1,700 nits of brightness (vs. 250-300 nits for standard monitors). This results in amazingly bright, crystal-clear images, even with direct, bright sunlight on the face of the screen. The SRMH-15-AR Series Sunlight Readable monitors are ideal for use in a wide range of industrial, law enforcement, aviation, marine, military, inspection, advertising, material handling (cranes) and transportation applications where viewability in direct bright sunlight is crucial.


All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability.

Specifications		
MODEL	SRMH-15S-AR	SRMH-15B-AR
LCD Panel	15" Color TFT LCD Monitor	
Resolution	1024 x 768 (XGA)	
Backlights	LED	
Viewable Area	11.97"(W) x 8.98"(H) (304.03 x 228.09 mm)	
Pixel Pitch	0.297mm x 0.297mm	
Display Colors	16.2 Million	
Aspect Ratio	4:3	
Brightness	1,700 nits	
Contrast Ratio	700:1	
Viewing Angle	170° (H) x 160° (V)	
Response Time	8 msec Trf	
Control	OSD (On-Screen Display) via Front Panel Pushbuttons	
Video Inputs	VGA, S-Video, Composite (BNC) NTSC/PAL Auto-Recognition	VCA, Composite BNC Loop-Thru (1 input, 1 output) NTSC/PAL Auto-Recognition
In/Output Impedance	75Ω/Auto Terminating Output	
Power Requirement	12 VDC (90-240 VAC with Included Power Brick)	
Power Consumption	50 Watts	
Enclosure	ABS	
Mounting	Via Included Tabletop Base or Via 75x75mm Rear VESA Hole Pattern	Via 75mm Rear VESA Hole Pattern (Base Optional)
Operating	-22° to 185°F (-30° to 85° C)	
Humidity	5-90% RH	
Shock	50 G (20 msec, 1 / 2 sine)	
Vibration	1.5G RMS 10-200 HZ	
Dimensions	13.7"(W) x 10.9"(H) x 1.5"(D) (347.97(W) x 276.86(S) x 38.09(D) mm)	
Weight	4.9 lbs. (2.22 kg)	

# SRMH-15-AR Series

## 15" Sunlight Readable LCD Monitors

### Dimensions

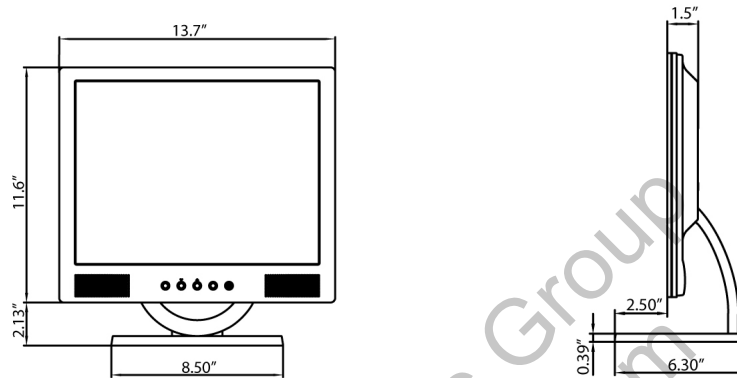

### Standard Accessories:

- 90-240 VAC Power Brick
- VGA Cable
- Tabletop Base (on "S" Model; optional on "B" Model)

### Available Options:

- Tabletop Base
- DVI Video Input
- Internal Speakers
- Panel Mount
- Rack Mount
- Open-Frame Configuration
- Private Label
- Other Customer - Specific Modifications