



ELECTRONIC GROUP, INC
 480-635-8400 p * aegis-g2@aegiselect.com
<http://www.aegis-elec.com>

ZBVM-18.5R

18.5" HD Zero-Bezel LCD Monitor



- Zero-Bezel, Seamless, All Glass Front Face
- Sleek Design, Easy to Clean
- HD Resolution: 1366 x 768 (720p)
- LED Backlights
- Widescreen 16:9 Format
- Dual Built-in Speakers (Rear)
- LED Backlights
- Lockable On-Screen Display (OSD) Controls
- Can Be Customized To Meet Your Needs
- 3 Year Warranty

The ZBVM-18.5R offers the latest look in LCD monitor technology. The zero-bezel design removes the front frame (or bezel) used on standard monitors and replaces it with a seamless edge-to-edge piece of Anti-Glare glass. Coupled with a sleek and slim black or brushed aluminum body, the ZBVM-18.5R is an elegant solution for healthcare, kiosks, hospitality, A/V, commercial, digital signage and other markets.

However, don't be fooled by its stylish good looks. Inside, the ZBVM-18.5R features the same high-quality components and rugged performance that **TRU-Vu** Monitors are known for. It is backed by our standard 3-Year Warranty, and will provide brilliant HD-quality images for years to come.


All **TRU-Vu** industrial LCD monitors are specifically designed for use in demanding applications. Every **TRU-Vu** monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit www.TRU-VuMonitors.com for more details.

Specifications	
LCD Panel	18.5" TFT Color LCD
Display Resolution	1366 x 768 (WXGA)
Viewable Area	16.13" x 9.07" (409.8 x 230.4 mm)
Pixel Pitch	0.300mm
Display Colors	16:7 M
Aspect Ratio	16:9
Brightness	250 nits
Contrast Ratio	1,000:1
Viewing Angle	170° (H) x 160° (V)
Response Time	5 ms Trf
Control	OSD (On-Screen Display) via Pushbuttons (Lockable)
Video Input Connectors	VGA, HDMI, DisplayPort
Video Inputs	VGA, HDMI, Display Port and DVI (via optional HDMI-to-DVI adapter)
Power Requirement	12 VDC / 90-260 VAC with included power brick
Power Consumption	16W
Enclosure	ABS, Zero-Bezel Front Face
Mounting	Tabletop Base or 100 x 100 mm VESA
Operating Temperature	32° to 122° F / 0 to 50° C
Dimensions	17.8" (W) x 11.2" (H) x 2.1" (D) / 452.12 (W) x 284.48 (H) x 53.34 (D) mm
Weight	9.2 lbs. / 4.17 kg
Approvals	UL, FCC, CE, RoHs

ZBVM-18.5R

18.5" HD Zero-Bezel LCD Monitor

Dimensions:

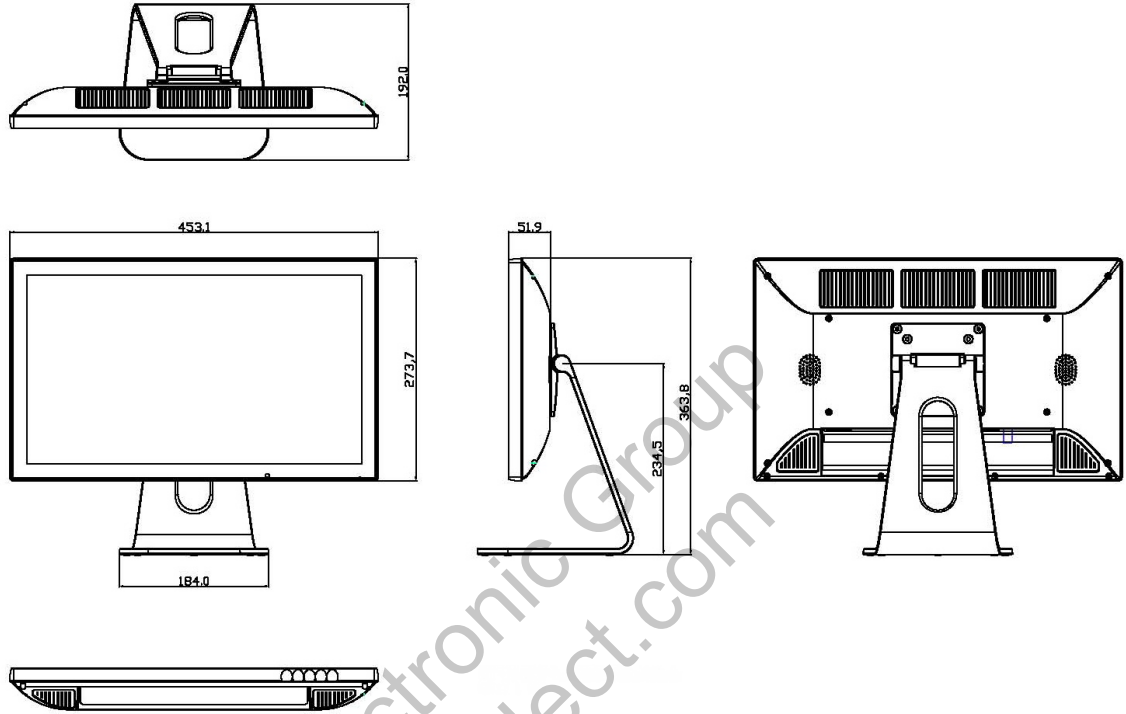

Standard Accessories:

- 90-260 VAC Power Brick
- Tabletop Stand
- VGA Cable
- HDMI Cable
- Audio Cable

Available Options:

- HDMI-to-DVI Adapter
- Protective/Anti-Reflective Glass Screen
- Touch Screen
- Private Label
- Other Customer - Specific Modifications