



**ELECTRONIC GROUP, INC**  
 480-635-8400 p \* aegis-g2@aegiselect.com  
 http://www.aegis-elec.com



## SRMT-19 Series

### 19" Sunlight Readable Touch Screen LCD Monitor

- Produces Clear, Sharp Images Even in Direct, Bright Sunlight
- 1,000 nits Brightness
- 5-Wire Resistive or Surface Capacitive Touch
- Anti-Reflective Film
- Auto Re-Start After Power Loss
- Lockable OSD (On-Screen Display) Controls
- 3 Year Warranty

The SRMT-19 Series Sunlight Readable Touch Screen monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. They utilize state-of-the-art LED backlights to produce over 1,000 nits of brightness (vs. 250-300 nits for standard monitors). This results in amazingly bright, crystal-clear images, even with direct, bright sunlight on the face of the screen. SRMT-19 Series Sunlight Readable Touch Screen monitors will eliminate the need for sun-shields, squinting or straining to see washed-out images. The capacitive touch screen can only be activated via a naked human finger, greatly reducing the possibility of false-triggering. The resistive touch screen can be activated via nearly any type of object.


All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable

Specifications			
MODEL	SRMTC-19V	SRMTC-19C	SRMTR-19C
LCD Panel	19" Color LCD; LED Backlights		
Touch Screen	Surface Capacitive		5-Wire Resistive
Touch Interface	USB		
Resolution	1280 x 1024 (SXGA)		
Viewing Area	14.81" (W) x 11.85" (H) (376.17 mm x 300.98 mm)		
Pixel Pitch	0.294mm x 0.294mm		
Display Colors	16.7 Million		
Aspect Ratio	4:3 (5:4)		
Brightness	1,000 nits		
Contrast Ratio	1,000:1		
Viewing Angle	170° (H) x 160° (V)		
Response Time	5 msec (Trf)		
Control	OSD (On-Screen Display) via Front Panel Pushbuttons		
Video Input	VGA	VGA & DVI	
Audio	Dual Rear Speakers		
Power	12 VDC (90-240 VAC with Included Power Brick)		
Power	48 Watts		
Enclosure	ABS		
Mounting	Included Base or 75x75mm VESA Hole Pattern		
Operating	32° to 122° F (0° to 50° C)		
Humidity	5-90% RH		
Shock	50 G (20 msec, ½ sine)		
Vibration	1.5G RMS 10-200 HZ		
Approvals	UL/cUL, FCC, CE, RoHS		
Dimensions	16.5" (W) x 13.75" (H) x 1.95" (D) (419.09 (W) x 349.25 (H) x 49.52 (D) mm)		
Weight	11 lbs. / 5 kg		
Included	90-240 VAC Adapter, VGA Cable, Tabletop Base		
Warranty	3 Years		

# SRMT-19 Series

## 19" Sunlight Readable Touch Screen LCD Monitor

### Dimensions:

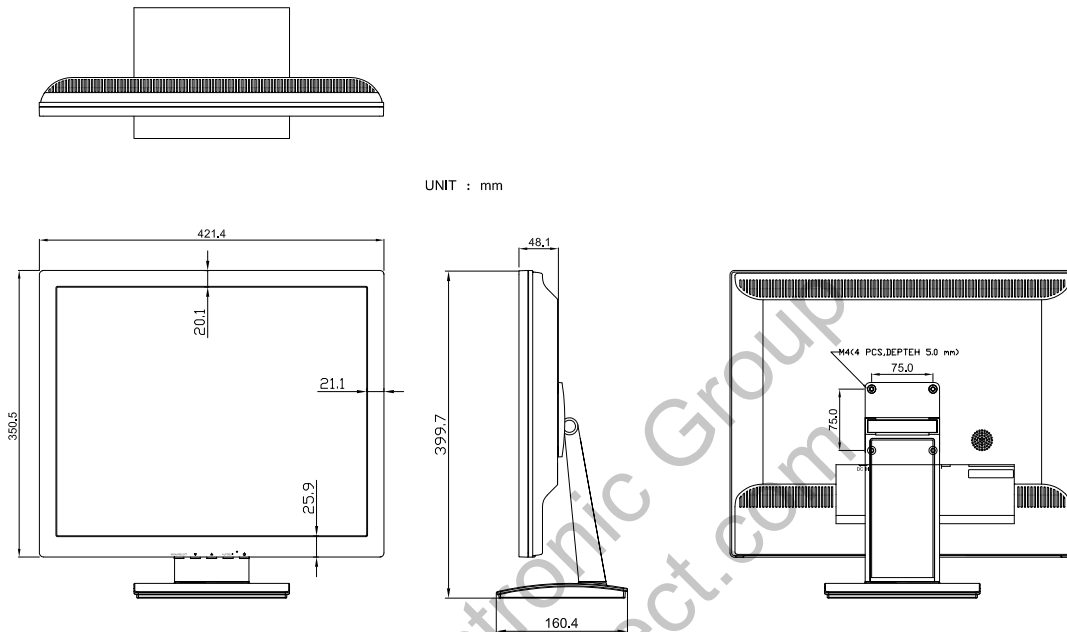

### Standard Accessories:

- 90-240 VAC Power Brick
- VGA Cable
- Tabletop Base

### Available Options:

- Protective Anti-Glare Glass
- Vandal-Resistant Glass
- Waterproof Enclosure
- Panel Mount Enclosure
- Open-Frame Configuration
- Wall Mount Brackets
- Private-Label
- Other Customer - Specific Modifications