



**ELECTRONIC GROUP, INC**  
 480-635-8400 p \* aegis-g2@aegiselect.com  
 http://www.aegis-elec.com

## SRM-21.5 Series 21.5" Sunlight Readable HD LCD Monitor



- True Sunlight-Readable HD Monitor
- 1,000 to 1,500 Nits Brightness
- Full HD Resolution: 1920 x 1080 (1080p/60)
- LED Backlights
- **TRU-Tuff** Ensures Maximum Shock & Vibration Resistance
- Automated Ambient Light Sensor
- Auto Re-Start After Power Loss
- Lockable On-Screen Display (OSD) Controls
- Rugged Powder-Coated Steel Enclosure
- Can Be Customized To Meet Your Needs
- 3-Year Warranty

The SRM-21.5 Series Sunlight Readable HD LCD monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. These state-of-the-art monitors produce over 1,000/1,500 nits of brightness (vs. 250-300 nits for standard monitors). This results in amazingly bright, crystal-clear HD images, even with direct, bright sunlight on the face of the screen. The SRM-21.5 Series Sunlight Readable monitors are ideal for use in a wide range of industrial, law enforcement, aviation, marine, military, inspection, advertising and transportation applications where viewability in direct bright sunlight is crucial.


All **TRU-Vu** industrial LCD monitors are specifically designed for use in demanding applications. Every **TRU-Vu** monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit [www.TRU-VuMonitors.com](http://www.TRU-VuMonitors.com) for more details.

	Specifications	
MODEL	SRM-21.5R-MV	SRMH-21.5R
LCD Panel	21.5" Color MVA Panel	
Display Resolution	1920 x 1080 (1080p/60 Full HD)	
Viewable Area	18.76" x 10.55" (476.6 x 268.1 mm)	
Pixel Pitch	0.248mm	
Display Colors	16.7 M	
Aspect Ratio	16:9	
Brightness	1,000 nits	1,500 nits
Contrast Ratio	5,000:1	
Viewing Angle	178° (H) x 178° (W)	
Response Time	16 msec TrF	
Control	OSD (On-Screen Display) via Pushbuttons	
Video Input Connectors	VGA, HDMI, DisplayPort	
Video Inputs	VGA, HDMI, DisplayPort (DVI via optional HDMI to DVI adapter)	
Power Requirement	12 VDC / 90-240 VAC with included power brick	
Power Consumption	45W	55W
Enclosure	Powder-Coated Steel	
Mounting	100 x 100 mm VESA Mount Holes (Tabletop Base Optional)	
Operating Temperature	14° to 122° F (-10 to 50° C); Humidity: 5-90% Non-Condensing	
Shock	50G, Half-sine Wave, 20ms, X/Y/Z	
Vibration	Acceleration: 1.5 G RMS; Random Wave; 10-200Hz; 30 mins Per Axis (X,Y,Z)	
Dimensions	20.90" (W) x 12.67" (H) x 2.16" (D) (531 (W) x 322.0 (H) x 55.0 (D) mm)	
Weight	10.3 lbs (4.67 kg)	
Included Accessories	HDMI Cable, VGA Cable, HDMI-to-DVI Adapter, Remote Control	
Options	Tabletop Base, Speakers	
Warranty	3-Years	

# SRM-21.5 Series

## 21.5" Sunlight Readable HD LCD Monitor

### Dimensions:

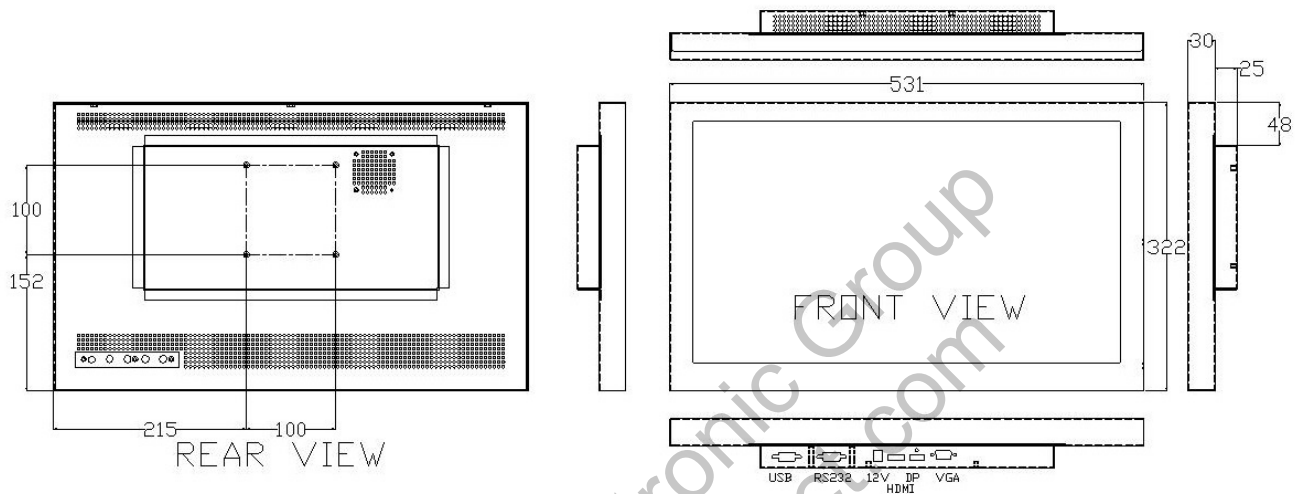

### Standard Accessories:

- 90–240 VAC Power Brick
- VGA Cable
- HDMI Cable
- HDMI-to-DVI Adapter
- Remote Control

### Available Options:

- Automatic Ambient Light Sensor
- DVI Input
- Tabletop Base
- Wall Mount Brackets
- Open-Frame Configuration
- Private Label
- Other Customer-Specific Modifications