



ELECTRONIC GROUP, INC
 480-635-8400 p * aegis-g2@aegiselect.com
 http://www.aegis-elec.com

ZBMT-21.5 Series 21.5" HD Multi-Touch Touch Screen LCD Monitor



- Projected Capacitive Touch Technology
- Can Be Activated Via Exposed Finger, and Surgical or Cotton Gloves
- Zero-Bezel, Seamless, All-Glass Front Face
- Sleek Design, Easy to Clean
- Full HD Resolution: 1920 x 1080 (1080p/60)
- Dual Built-in Speakers (Rear)
- LED Backlights
- Can Be Customized To Meet Your Needs
- 3 Year Warranty

The ZBMT-21.5 Series projected capacitive, multi-touch, zero-bezel touch screen monitors offer the latest in LCD touch screen technology. The projected capacitive touch technology can be activated via an exposed finger (like standard capacitive touch), and also a finger inside a surgical glove or thin cotton glove. The multi-touch capability allows simultaneous dual finger operation for selecting, zoom, flick and other functions. It is also unaffected by dirt, grease or moisture on the glass surface. The sleek all-glass, seamless, zero-bezel front face is stylish as well as functional; it is easy to clean and eliminates the potential for contamination build-up under the bezel. The thin black or brushed aluminum housing finishes off the elegant look, and is perfect for healthcare, kiosk, hospitality and other applications.

All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit www.TRU-VuMonitors.com for more details.


Specifications

Model	ZBMT-21.5C-120	ZBMT-21.5C	ZBMT-21.5R
LCD Panel	21.5" TFT Color LCD		
Touch Screen Type	Projected Capacitive Touch		
Display Resolution	1920 x 1080 (1080p/60 Full HD)		
Viewable Area	18.76" x 10.55" (476.6 x 268.1 mm)		
Pixel Pitch	0.248mm		
Display Colors	16:7 M		
Aspect Ratio	16:9		
Brightness	250 nits		
Contrast Ratio	5,000:1		
Viewing Angle	178° (H) x 178° (V)		
Response Time	12 ms Trf		
Control	OSD (On-Screen Display) via Pushbuttons		
Video Input Connectors	VGA, DVI		VGA, HDMI, DisplayPort
Video Inputs	VGA, DVI		VGA, HDMI, Display Port (DVI via optional HDMI-to-DVI adapter)
Power Requirement	90-260 VAC (internal power supply)	12 VDC/90-260 VAC with included external power brick	
Power Consumption	Max. 22W at 12 VDC/2.1A		
Enclosure	ABS, Zero-Bezel Front Face		
Mounting	100 x 100 mm VESA		
Operating Temperature	32° to 122° F / 0 to 50° C		
Dimensions	20.5" (W) x 13.55" (H) x 2.3" (D) / 520.7 (W) x 344.17 (H) x 58.42 (D) mm		

ZBMT-21.5 Series

21.5" HD Multi-Touch Touch Screen LCD Monitor

Dimensions:

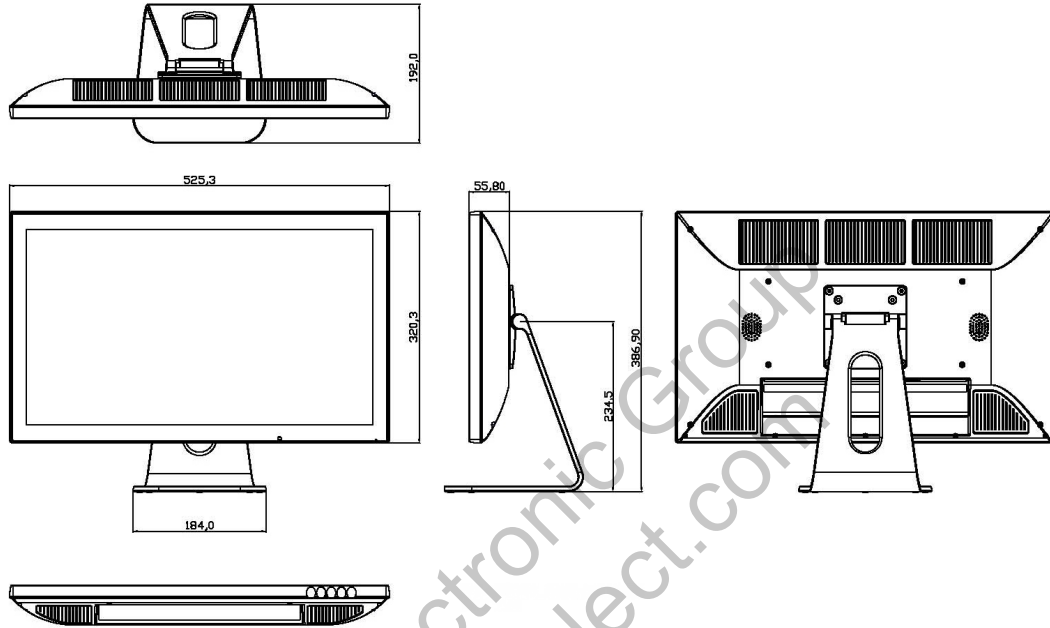

Standard Accessories:

- 90-260 VAC Power Brick (Except ZBMT-21.5C-120)
- Tabletop Stand
- VGA Cable
- HDMI Cable
- USB Cable
- Audio Cable

Available Options:

- HDMI-to-DVI Adapter
- Protective/Anti-Reflective Glass Screen
- Private Label
- Other Customer - Specific Modifications