



**ELECTRONIC GROUP, INC**  
 480-635-8400 p \* aegis-g2@aegiselect.com  
 http://www.aegis-elec.com

## SRM-24-MV Series 24" Sunlight Readable HD LCD Monitors



- True Sunlight-Readable HD Monitor
- 1,000/1,500 Nits Brightness
- Full HD Resolution: 1920 x 1080 (1080p/60)
- Dual Speakers
- Auto Re-Start After Power Loss
- Optional Automatic Ambient Light Sensor
- Lockable On-Screen Display (OSD) Controls
- Can Be Customized To Meet Your Needs
- 3 Year Warranty

The SRM-24-MV Series Sunlight Readable HD LCD monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. These state-of-the-art monitors produce over 1,000 nits of brightness (vs. 150-200 nits for standard laptops). This results in amazingly bright, crystal-clear HD images, even with direct, bright sunlight on the face of the screen. The SRM-24-MV Series Sunlight Readable monitors are ideal for use in a wide range of industrial, law enforcement, aviation, marine, military, inspection, advertising and transportation applications where viewability in direct bright sunlight is crucial.


All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit [www.TRU-VuMonitors.com](http://www.TRU-VuMonitors.com) for more details.

Specifications			
MODEL	SRM-24P-MV	SRM-24R-MV	SRMH-24R
LCD Panel	24" MVA Panel; LED Backlights		
Resolution	1920 x 1080 (1080p/60 Full HD)		
Viewable Area	20.91" x 11.47"(H) (531.36 x 298.9 mm)		
Pixel Pitch	0.277mm		
Display Colors	16.7 M		
Aspect Ratio	16:9		
Brightness	1,000 nits		1,500 nits
Contrast Ratio	3,000:1		
Viewing Angle	178° (H) x 178° (V)		
Response Time	25 ms Trf		
Control	OSD (On-Screen Display) via Pushbuttons		
Video Inputs	DVI-I, S-Video, Composite	VGA, HDMI, DisplayPort	
Audio	Dual Rear Speakers		Optional
Power Requirement	12 VDC (2.5 mm Barrel Plug); 90-240 VAC via Included Power Brick		
Power Consumption	45 Watts		
Enclosure	ABS		
Mounting	Via 100 x 100 mm / 200 x 100 Rear VESA Mount Holes (or Optional Tabletop Base)		
Operating Temperature	-4°F to +158°F (-20° to +70°C)		
Humidity	5 - 90% RH		
Shock	50G (20 msec, 1/2 sine) +/-X, +/-Y, +/-Z		
Vibration	1.5G RMS, 10-200 Hz, 30 mins each Axis (X, Y, Z)		
Dimensions	22.68"(W) x 13.55"(H) x 2.44"(D) (576.1 x 344.3 x 62.10 mm)		
Weight	12.75 lbs. (5.78 kg)		
Included Accessories	VGA, DVI, & Audio Cables; VGA/DVI Adapter, Tabletop Base, AC Power Supply	VGA & HDMI Cables; Tabletop Base, AC Power Supply	
Warranty	3 Years		

# SRM-24-MV Series

## 24" Sunlight Readable HD LCD Monitors

### Dimensions: (mm)

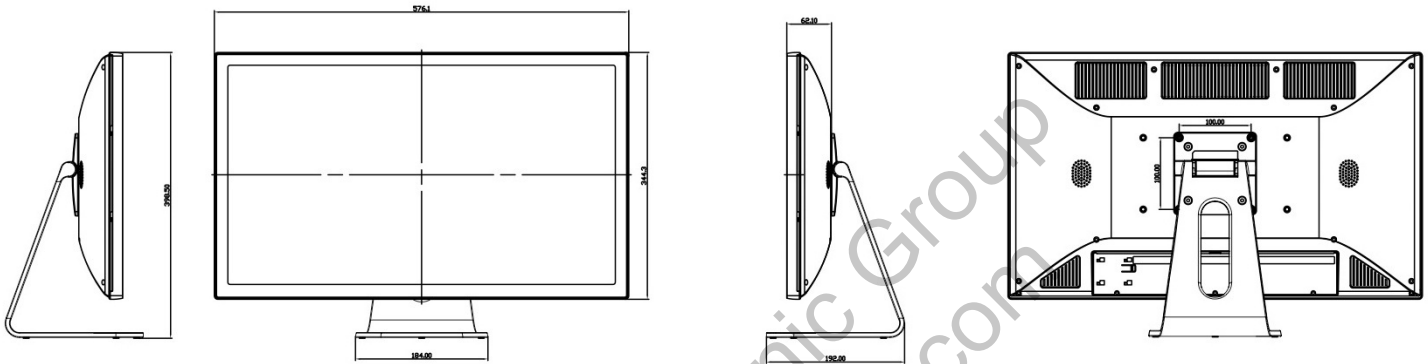

### Standard Accessories:

- 90-240 VAC Power Brick
- VGA Cable
- Audio Cable
- DVI Cable

### Available Options:

- Tabletop Base
- Remote Control
- Optical Bonding & Anti-Reflective Glass
- 24 VDC Operation
- Open-Frame Configuration
- Touch Screen
- Waterproof Enclosure
- Ambient Light Sensor
- Wall Mount Bracket
- Other Customer - Specific Modifications