



SRM-27 Series

27" Sunlight Readable HD LCD Monitor

- True Sunlight Readable HD Monitor
- 1,000 Nits Brightness
- Full HD Resolution: 1920 x 1080 (1080p/60)
- Auto Re-Start After Power Loss
- Dual Speakers
- Video Inputs: VGA, HDMI, DisplayPort, DVI
- Lockable On-Screen Display (OSD) Controls
- Can Be Customized To Meet Your Needs

The SRM-27 Series Sunlight Readable HD LCD monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. These state-of-the-art monitors produce over 1,000 nits of brightness (vs. 150-200 nits for standard laptops). This results in amazingly bright, crystal-clear HD images, even with direct, bright sunlight on the face of the screen. The SRM-27 Series Sunlight Readable monitors are ideal for use in a wide range of industrial, law enforcement, aviation, marine, military, inspection, advertising and transportation applications where viewability in direct bright sunlight is crucial.

All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit www.TRU-VuMonitors.com for more details.


Specifications

MODEL	SRM-27C	SRM-27R	SRM-27R-MV
LCD Panel	27" Color TN Panel; LED Backlights		27" Color MVA Panel; LED Backlights
Display Resolution	1920 x 1080		
Viewable Area	23.53" (W) x 13.23" (H) (597.6 x 336.15 mm)		
Pixel Pitch	0.311mm		
Display Colors	16:7 M		
Aspect Ratio	16:9		
Brightness	1,000 nits		
Contrast Ratio	1,000:1		
Viewing Angle	170° (H) x 160° (W)		178° (H) x 178° (V)
Response Time	5 ms		
Control	OSD (On-Screen Display) via Front Pushbuttons		
Video Inputs	VGA & DVI	VGA, HDMI, DisplayPort	
Audio	Dual Rear Speakers		
Power Requirement	12 VDC (2.5 mm Barrel Plug); 90-240 VAC via Included Power Brick		
Power Consumption	45 W		
Enclosure	ABS		
Mounting	Via Included Base or 100 x 100 mm / 200 x 100 Rear VESA Mount Holes		
Operating Temperature	+32° to +122° F (0° to +50° C)		
Humidity	5-90% RH		
Shock	50G Half-sine 20 msec		
Vibration	1.5G RMS 10-200 Hz		
Dimensions	25.38" (W) x 15.25" (H) x 2.63" (D) (644.65 x 387.35 x 66.80 mm)		
Weight	12.08 lbs. (5.48 kg)		
Warranty	3 Years		

SRM-27 Series

27" Sunlight Readable HD LCD Monitor

Dimensions:

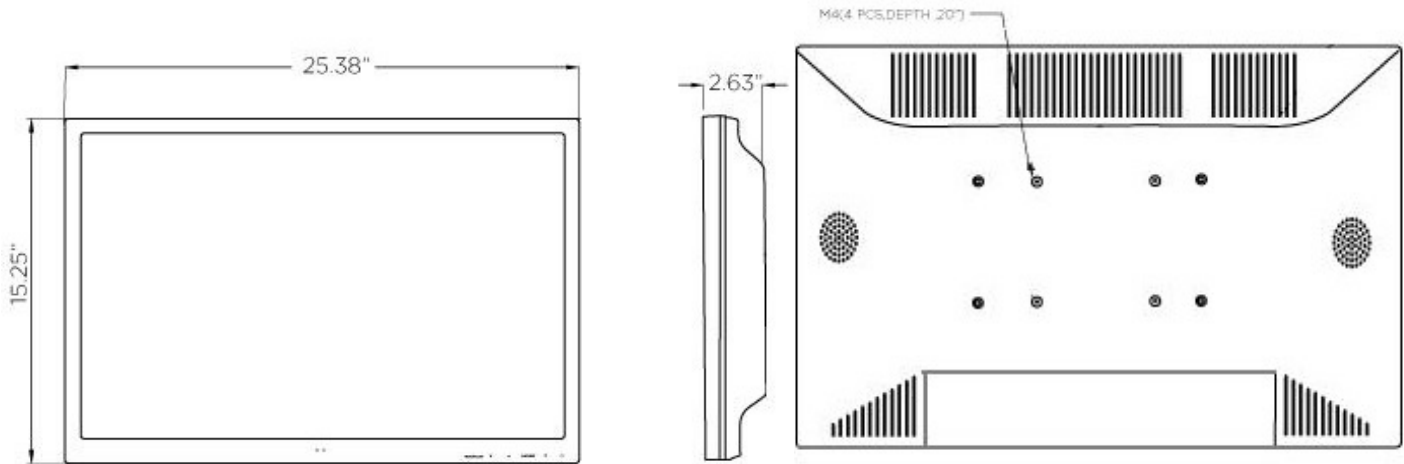

Standard Accessories:

- 90-240 VAC Power Brick
- VGA Cable
- HDMI Cable
- Audio Cable
- Tabletop Base

Available Options:

- Open-Frame Configuration
- Ambient Light Sensor
- Dim-to-Black Hotkeys
- Protective Anti-Reflective Glass
- Wall Mount Brackets
- Remote Control
- Private Label
- Other Customer - Specific Modifications