



SRM-32D

32" Sunlight Readable LCD Monitor

- 1,000 Nits Brightness
- Full HD Resolution 1920 x 1080
- Video Inputs: VGA, HDMI, Composite (BNC Loop-Thru), NTSC/PAL
- Auto Re-Start After Power Loss
- Lockable On-Screen Display (OSD) Controls
- Can Be Customized to Meet Your Needs
- 3-Year Warranty

The SRM-32D Sunlight Readable HD LCD monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. These state-of-the-art monitors produce over 1,000 nits of brightness (vs. 150-200 nits for standard laptops). This results in amazingly bright, crystal-clear HD images, even with direct, bright sunlight on the face of the screen. The SRM-32D Sunlight Readable monitors are ideal for use in a wide range of industrial, law enforcement, aviation, marine, military, inspection, advertising and transportation applications where viewability in direct bright sunlight is crucial.


All **TRU-Vu** industrial LCD monitors are specifically designed for use in demanding industrial, commercial, medical, and A/V applications. Every **TRU-Vu** monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability.

Specifications	
MODEL	SRM-32D
LCD Panel	32" TFT Color LCD
Display Resolution	1920 x 1080 (Full HD)
Viewing Area	27.50" (W) x 15.47"(H) (698.4 x 392.85mm)
Pixel Pitch	0.364mm x 0.364mm
Display Colors	16.7 Million
Aspect Ratio	16:9
Brightness	1,000 nits
Contrast Ratio	4,000:1
Viewing Angle	178° (H) x 178° (V)
Response Time	8 msec (gray to gray)
Control	OSD (On-Screen Display) via Rear Panel Push Buttons
Video Inputs	VGA, HDMI, Composite (BNC) x3
Video Outputs	Composite (BNC)
In / Out Impedance	75Ω / Auto Terminating Output
Power Requirement	90 -240 VAC
Power Consumption	100 Watts
Enclosure	Black Powder-Coated Steel
Mounting	Via Included Base or Rear VESA Mounting: 100x100mm, 100x200mm, 200x200mm
Operating Temperature	32° to 140°F (0° to +60°C)
Shock	50 G (11 msec 1/2 sine)
Vibration	1.5 G RMS 10-300Hz
Dimensions	29.33" (W) x 17.8" (H) x 2.2" (D) (745 x 452 x 56.80 mm)
Weight	32 lbs. (14.5 kg)
Warranty	3-Years

SRM-32D

32" Sunlight Readable LCD Monitor

Dimensions:

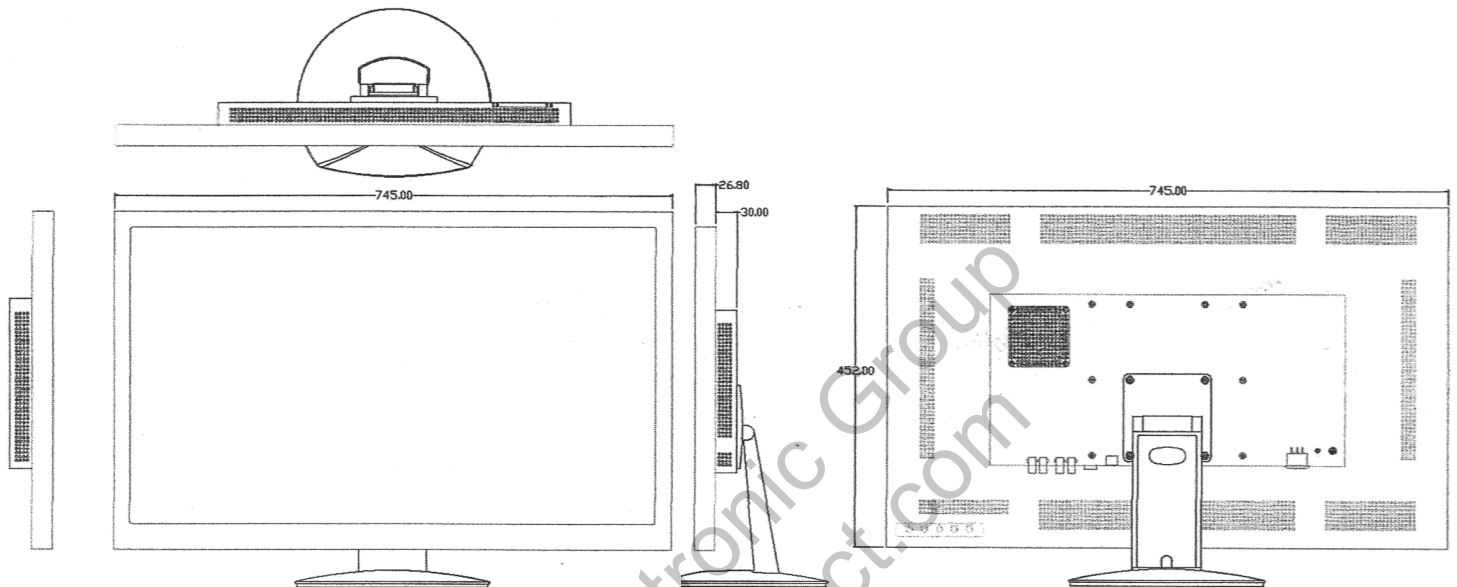

Standard Accessories:

- AC Power Cord
- Tabletop Stand
- VGA Cable

Available Options:

- Internal Speakers
- Protective/Anti-Reflective Glass
- Open-Frame Configuration
- Waterproof Enclosure
- Ambient Light Sensor
- Dim-to-Black Hotkeys
- Private Label
- Other Customer - Specific Modifications