



ELECTRONIC GROUP, INC
 480-635-8400 p * aegis-g2@aegiselect.com
 http://www.aegis-elec.com

SRMW-32R-SS

32" Outdoor Sunlight Readable LCD Monitor



- True Sunlight-Readable Outdoor Monitor
- 1,000 Nits Brightness
- Full HD Resolution: 1920 x 1080 (1080p/60)
- NEMA 4X Water Resistant Stainless Steel Enclosure
- Video Inputs: VGA, HDMI, DisplayPort
- Anti-Reflective Glass
- Auto Re-Start After Power Loss
- Can Be Customized To Meet Your Needs
- 3-Year Warranty

The SRMW-32R-SS is an excellent outdoor Sunlight Readable monitor. It is designed to operate in direct sunlight, or other high ambient light conditions. This monitor produces over 1,000 nits of brightness, ensuring clear, sharp images even in direct, bright sunlight. The SRMW-32R-SS features a rugged NEMA 4X stainless steel enclosure. It is completely sealed and will withstand rain, snow, sleet, etc. (Note there are two small ventilation holes on the bottom.) These are ideal for outdoor use in a wide range of applications including military, law enforcement, stadiums, amusement parks, advertising, transportation, marine, auto racing, oil and gas, inspection and other industries where viewability outdoors in direct sunlight is crucial.

All **TRU-Vu** industrial LCD monitors are specifically designed for use in demanding applications. Every **TRU-Vu** monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit www.TRU-VuMonitors.com for more details.


Specifications

	SRMW-32R-SS
MODEL	SRMW-32R-SS
LCD Panel	32" Color MVA Panel; LED Backlights
Display Resolution	1920 x 1080 (1080p/60 Full HD)
Viewable Area	27.48" (W) x 15.46" (H) (698.4 x 392.85 mm)
Pixel Pitch	0.364mm x 0.364mm
Display Colors	16.7 M
Aspect Ratio	16:9
Brightness	1,000 nits
Contrast Ratio	3,000:1
Viewing Angle	178° (H) x 178° (W)
Response Time	8 msec (gray to gray)
Control	OSD (On-Screen Display) via Rear Panel Pushbuttons
Video Inputs	VGA, HDMI, DisplayPort
Power Requirement	90-240 VAC
Power Consumption	100 Watts
Enclosure	NEMA 4X Weatherproof Stainless Steel (Vent Holes On Bottom)
Mounting	200 x 200 mm Rear VESA Mount Holes
Operating Temperature	32° to 140° F (0 to +60° C)
Shock	50 G (11 msec, ½ sine)
Vibration	1.5 G RMS 10-300Hz
Dimensions	30.45" (W) x 17.89" (H) x 3.46" (D) (773.6 x 454.5 x 79.4 x 88 mm)
Weight	39.2 lbs (17.78 kg)
Warranty	3-Years

SRMW-32R-SS

32" Outdoor Sunlight Readable LCD Monitor

Dimensions:

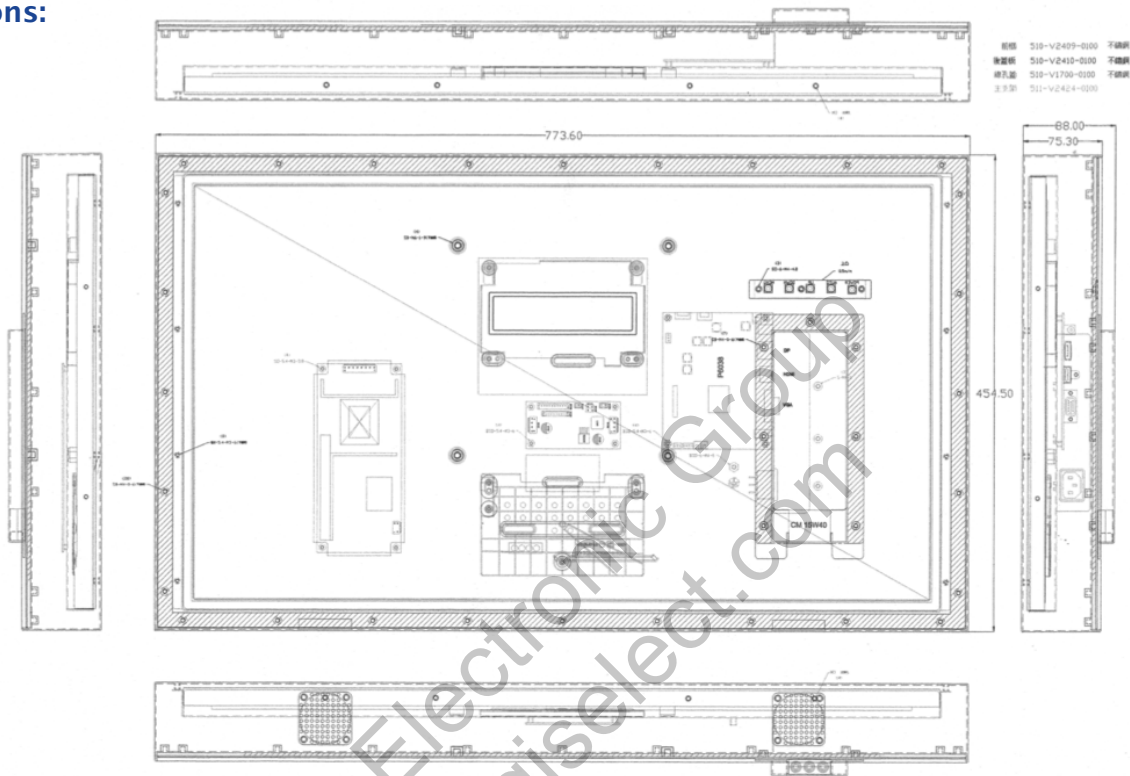

Standard Accessories:

- AC Power Cord
- VGA Cable
- HDMI Cable

Available Options:

- DVI Input
- Composite (BNC) Input
- Wall Mount Brackets
- Private Label
- Other Customer-Specific Modifications