




**ELECTRONIC GROUP, INC**  
 480-635-8400 p \* aegis-g2@aegiselect.com  
 http://www.aegis-elec.com

# VZ-65UHD

## 4K UHD / QUAD VIEW LED MONITOR

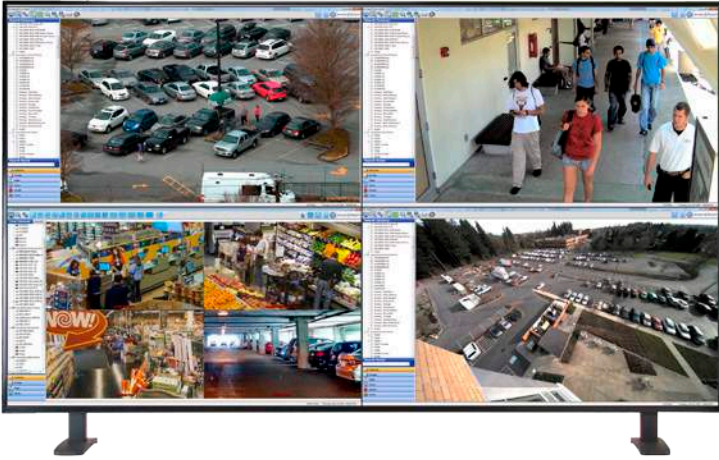

### VZ-65UHD ADVANTAGES

- 65" 4K UHD LED Panel
- Supports 4K (3840X2160) Resolution
- Supported Display Port (1.2) & HDMI (2.0 & 1.4)
- **Mode 1:** Displays 4K (3840X2160) Resolution
- **Mode 2:** PBP, PIP & Quad (Each 1080p) PIP
- Wide Viewing Angle (IPS Panel)
- Universal Wall Mounting
- Auto Source / Power Recovery




### PIP Window MATRIX


	TYPE OF INPUT			
Combination 1	HDMI 2.0	HDMI 1.4	HDMI 1.4	HDMI 1.4
Combination 2	HDMI 2.0 or 1.4	HDMI 1.4	HDMI 1.4	Display Port

MODEL #	VZ-65UHD
<b>VIDEO</b>	
Screen Size	65"
Max. Resolution	3840 x 2160 @60Hz
Pixel Pitch	0.124 mm x 0.374 mm
Brightness	400cd/m <sup>2</sup> (Typical)
Contrast Ratio	4000:1
Aspect Ratio	16 : 9 (1.78 : 1)
Viewing Angle (H/V)	178° / 178°
Display Color	1.07G
Response Time	< 9.5 ms
<b>INTERFACE</b>	
Display Port In	1
HDMI (2.0) In	1
HDMI (1.4) In	3
Audio Out	1
<b>DIMENSIONS &amp; WEIGHT</b>	
Outline Dimension (W x H x D)	57.15" x 33.18" x 2.2" 1451.7 mm x 842.9 mm x 55.8 mm
Net Weight / Gross Weight	127.86 lbs ( 58.0 kg ) / 136.68 lbs ( 62.0 kg )
<b>SPECIAL FEATURES</b>	
Image Retention	YES
Multi Display Function	PIP / Dual / Quad
<b>AUDIO</b>	
Built in speaker	5W x 2
<b>REFRESH RATE</b>	
HDMI (2.0) In	3840 x 2160 @ 60Hz
HDMI (1.4) In	3840 x 2160 @ 30Hz
Display Port In	3840 x 2160 @ 60Hz
<b>MOUNT</b>	
Universal Wall Mount	400 x 400 mm (M8xL12)
<b>GENERAL</b>	
Operating Temperature	YES
Power Electrical Ratings	AC100 ~ 240V(50/60Hz)
Consumption	≤ 215 W
Operating Temperature	32 - 122°F / 0°C ~ 50°C
Operating Humidity	40 ~ 60% RH
Regulations	CE, FCC (A), RoHS
Language (OSD)	English
Compatible Mounts	Wall
Accessories	VZ-WM71 Stand ( 1pc), Manual (1pc), Power Cord (1pc) Remote Control (Optional)

### DIMENSIONS

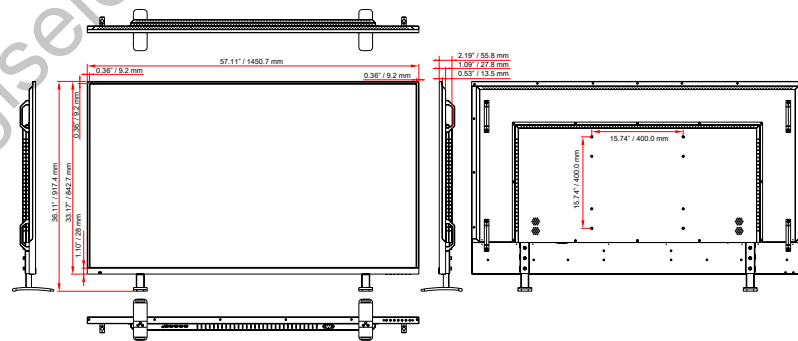

### INTERFACE



1. AC IN
2. HDMI 1.4 IN
3. HDMI 1.4 IN
4. HDMI 1.4 IN
5. HDMI 2.0 IN
6. DP IN
7. AUDIO Out