



ELECTRONIC GROUP, INC
480-635-8400 p * aegis-g2@aegiselect.com
http://www.aegis-elec.com

VZ-32iPM

FULL HD LED IP INPUT MONITOR



MODEL #	VZ-32iPM
---------	----------

VIDEO	
Screen Size	32"
Max. Resolution	1920 x 1080 @60Hz
Pixel Pitch	0.36375 mm x 0.36375 mm
Brightness	350cd/m ² (Typical)
Contrast Ratio	3000:1
Aspect Ratio	16 : 9
Viewing Angle (H/V)	178° / 178°
Display Color	16.7 Million
Response Time	< 12ms
Video System	NTSC / PAL
Frequency (H)	31 ~ 80Khz
Frequency (V)	56 ~ 75Hz

INTERFACE	
Ethernet 10/100	1
USB 2.0	2
Micro USB	1
PGM (Manufacture Only)	1
Micro SD	1

ANDROID BOARD SPEC	
Android OS	Ver. 5.1.1.
CPU	RK3368 64bit Octa core Cortex A53
RAM	2GB DDR3
Storage	8GB (Nand-Flash)
External Storage	Micro SD up to 32GB / USB 2.0 up to 2TB
Support Video File Format (up to 1080p)	MKV,WMV/VC-1 SP/MP/AP,MPG,MPEG, dat, AVI,MOV,MP4,RM,H.264/H.265, RV 8/9/10
Support Video Codec	H.264, MPEG4, RMVB, Xvid, Divx, H.263, H.264 VP8, WMV, HTML, FLASH
Support Image File Format	jpg, JPEG, MJPEG, PNG

SPECIAL FEATURES	
Sequential Viewing Mode	Basic ViewZ App support
9Ch Viewing Mode	Basic ViewZ App support

DIMENSIONS & WEIGHT	
Outline Dimension (W x H x D)	29.66" x 19.12" x 7.09"
	753.4mm x 485.7mm x 180mm
Net Weight / Gross Weight	33.07 lbs (15 kg) / 38.14 lbs (17.3 kg)


MOUNT	
VESA	200mm x 200mm / 4 x (M6 x 8) Screws

GENERAL	
Transmitter - IR Remote Control	YES
Power Electrical Ratings	AC100 ~ 240V(50/60Hz)
Consumption	55W
Warranty Parts/ Labor	3 Year / 3 Year
MTBF (Approx.)	50,000 Hours
Operating Temperature	32 - 104°F / 0 - 40°C
Multi-lingual Language	English, German, French, Italian, Spanish Portuguese, Netherlander, Russian
Compatible Mounts Wall	VZ-AM02-A, VZ-WM50
Ceiling	VZ-CM06, VZ-CM18, VZ-CMKIT-01, VZ-CMKIT-02


VZ-32iPM ADVANTAGES

- 32" LED Grade "A" Commercial Panel
- Full HD 1080p Resolution
- Ethernet 10/100
- Built-in Android OS / Cost-Effective Alternative to a Client PC
- Designed to Run Android Apps
- ViewZ App **Supports Over 8,000 Onvif Profile-S Cameras**
- **Sequential** and **9 Cameras Viewing** Available (ViewZ App)

DIMENSIONS

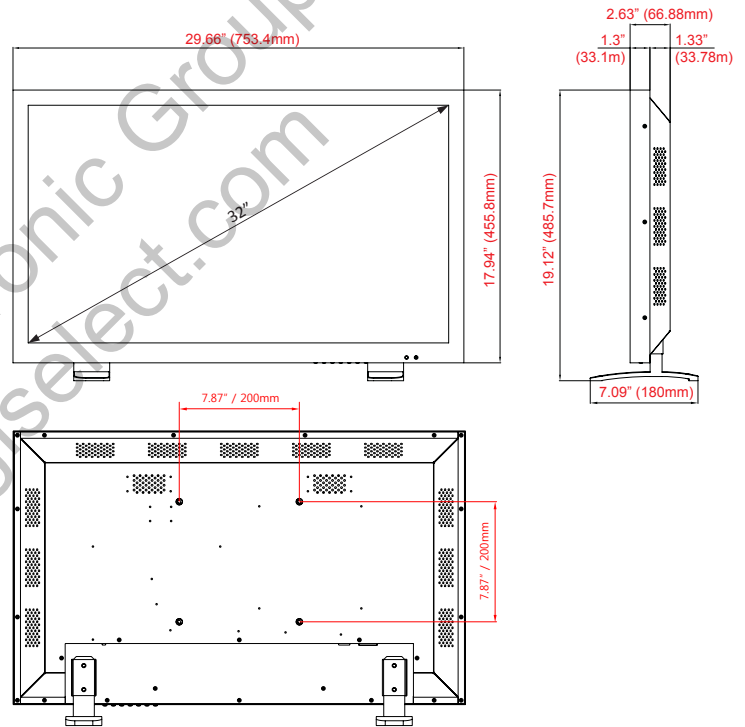

INTERFACE



1. PGM (Service Port)
2. DC 12V In
3. MICRO SD
4. USB 2.0 x 2ea
5. Micro USB
6. ETHERNET 10/100 (RJ 45)