

SRMTPWP-24R

24" Sunlight Readable Waterproof Panel-Mount Touch Screen Monitor



- 1,000 Nits Brightness
- Produces Clear, Sharp Images Even in Direct Bright Sunlight
- Projected Capacitive Touch
- Stainless Steel Panel-Mount Enclosure
- 1920 x 1080 (Full HD) Resolution
- Video Inputs: VGA, HDMI, DisplayPort
- Ambient Light Sensor
- Auto Re-Start After Power Loss
- Can Be Customized to Meet Your Needs
- 3 Year Warranty

The SRMTPWP-24R 24" Sunlight Readable touch screen monitors with waterproof panel-mount enclosure are designed for use in direct bright sunlight, or other high ambient light environments. The 1,000 nits of brightness ensure bright, crystal-clear images. The stainless steel panel-mount enclosure enables you to flush mount it into walls, dashboards, kiosks and machinery. The NEMA 4X front face ensures resistance to water. Projected capacitive touch technology can be activated via an exposed finger, and also when using thin latex or cotton gloves. The multi-touch capability allows up to 10 simultaneous finger operation for selecting, zoom, flick and other functions. It is also unaffected by dirt, grease or moisture on the glass surface.


All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation.

Specifications	
MODEL	SRMTPWP-24R
LCD Panel	24" Color LCD; LED Backlights
Display Resolution	1920 x 1080 (Full HD)
Touch Screen Type	Projected Capacitive
Touch Screen	USB
Viewable Area	20.92" (W) x 11.76" (H) (531.4 x 298.9 mm)
Pixel Pitch	0.277 mm
Display Colors	16:7M
Aspect Ratio	16:9
Brightness	1,000 nits
Contrast Ratio	5,000:1
Viewing Angle	178°(H) x 178°(V)
Response Time	25 ms
Control	OSD (On-Screen Display) via Rear Pushbuttons
Video Inputs	VGA, HDMI, DisplayPort
Power Requirement	90 - 240 VAC
Power Consumption	TBD
Enclosure	Panel-Mount with Rear Clamp; Stainless Steel
Enclosure Rating	NEMA 4X / IP65
Operating	-4° to 158°F (-20° to +70°C)
Humidity	5-90% RH
Shock	50G Half-sine
Vibration	1.5G RMS 10-200Hz
Dimensions	25.27" (W) x 16.20" (H) x 2.59" (D) (641.8 x 411.5 x 65.68 mm)
Weight	TBD
Warranty	3 Years

SRMTPWP-24R

24" Sunlight Readable Waterproof Panel-Mount Touch Screen Monitor

Dimensions:

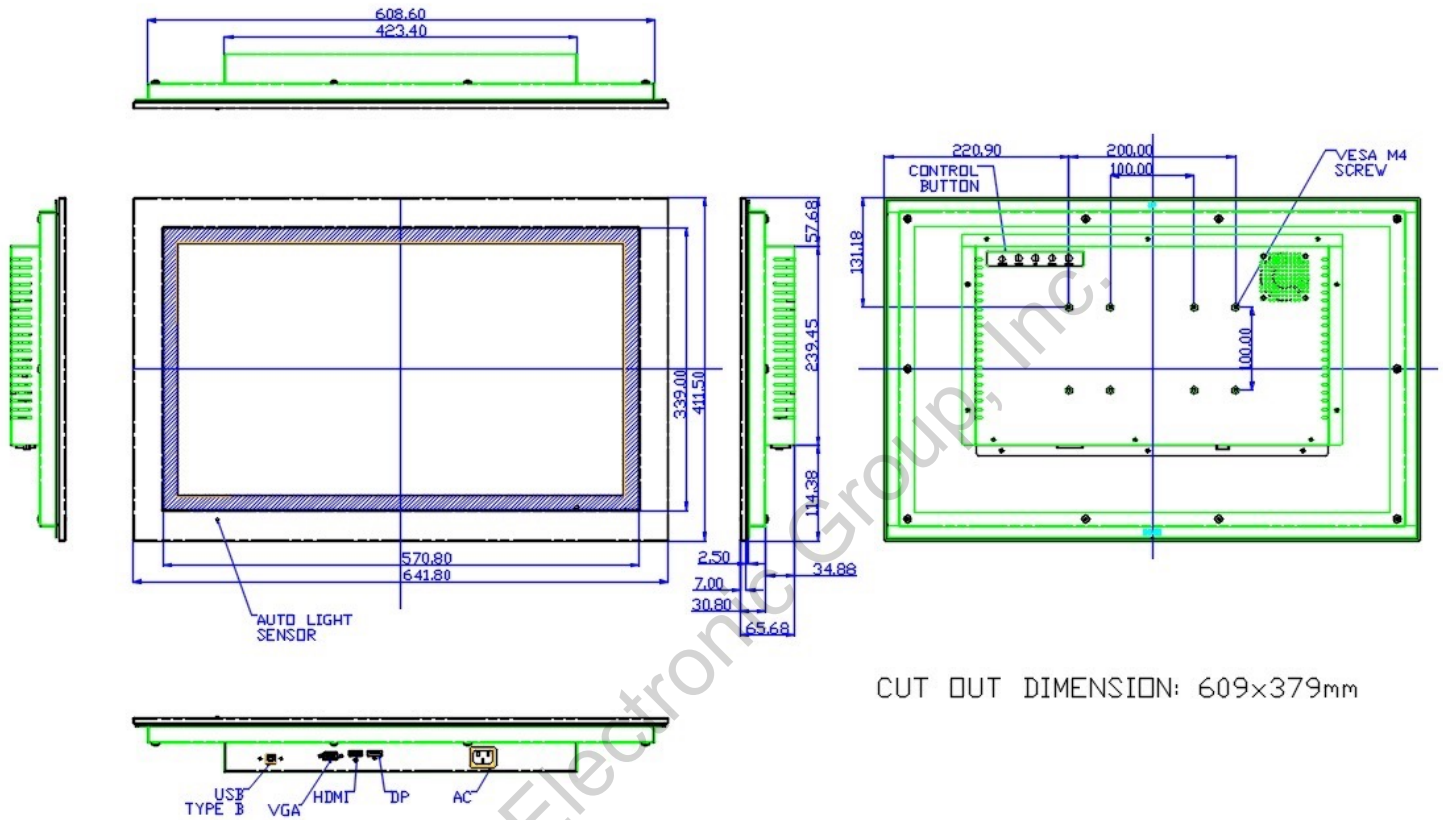

CUT OUT DIMENSION: 609x379mm

Standard Accessories:

- VGA Cable
- HDMI Cable
- USB Cable
- Power Cord

Available Options:

- DVI Input
- HD-SDI Input
- Private Label
- Other Customer-Specific Modifications

Specifications subject to change without notice.

v1117