



SRMHWP-10.4 Series

10.4" Sunlight Readable Waterproof Panel-Mount Monitors

- Produce Clear, Sharp Images Even in Direct Bright Sunlight
- 1,500 Nits Brightness
- Stainless Steel Panel-Mount Enclosure
- NEMA 4X / IP65 Waterproof Front Face
- Automatic Ambient Light Sensor
- Auto Re-Start After Power Loss
- Lockable On-Screen Display Controls
- 3 Year Warranty

The SRMHWP-10.4 Series Sunlight Readable Waterproof Panel-Mount monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. They utilize state-of-the-art LED backlights to produce over 1,500 nits of brightness (vs. 250-300 nits for standard monitors). The waterproof panel-mount enclosure enables installation in wash down or wet environments. The Ambient Light Sensor brightens or dims the screen as needed, depending upon ambient light conditions. The SRMHWP-10.4 Series Sunlight Readable Waterproof Panel-Mount monitors are ideal for use in a wide range of industrial, marine, military, manufacturing, inspection, advertising and transportation applications where viewability in direct bright sunlight is crucial.


All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit www.TRU-VuMonitors.com for more details.

| | Specifications | |
|-----------------------|--|---------------------------------------|
| MODEL | SRMHWP-10.4C | SRMHWP-10.4B |
| LCD Panel | 10.4" Color MVA LCD Panel (LED Backlights) | |
| Resolution | 800 x 600 (SVGA) | |
| Viewable Area | 8.31" (W) x 6.24" (H) | (211.2 x 158.4 mm) |
| Pixel Pitch | 0.264 mm | |
| Display Colors | 16.2 M | |
| Aspect Ratio | 4:3 | |
| Brightness | 1,500 nits | |
| Contrast Ratio | 3,000:1 | |
| Response Time | 15 msec Trf | |
| Viewing Angle | 178° (H) x 178° (W) | |
| Control | OSD (On-Screen Display) via Rear Panel Pushbuttons | |
| Video Inputs | VGA, DVI | VGA, Composite (BNC Loop-Thru); NTSC/ |
| Power Requirement | 12VDC/90-240VAC | |
| Power Consumption | 13W | |
| Enclosure | Stainless Steel Panel-Mount (Rear Clamp) | |
| Rating | NEMA 4X / IP65 Front Face | |
| Operating Temperature | -22 °F to +176 °F (-30 °C to +80 °C) | |
| Humidity | 8-90%RH | |
| Shock | 50 G (20 msec, ½ sine) | |
| Vibration | 1.5G RMS 10-200 HZ 30 mins/axis (X,Y,Z) | |
| Dimensions | 12.57" (W) x 9.87" (H) | (319.20 x 250.70 mm) |
| Warranty | 3 Years | |

SRMHWP-10.4 Series

10.4" Sunlight Readable Waterproof Panel-Mount Monitors

Dimensions: (mm)

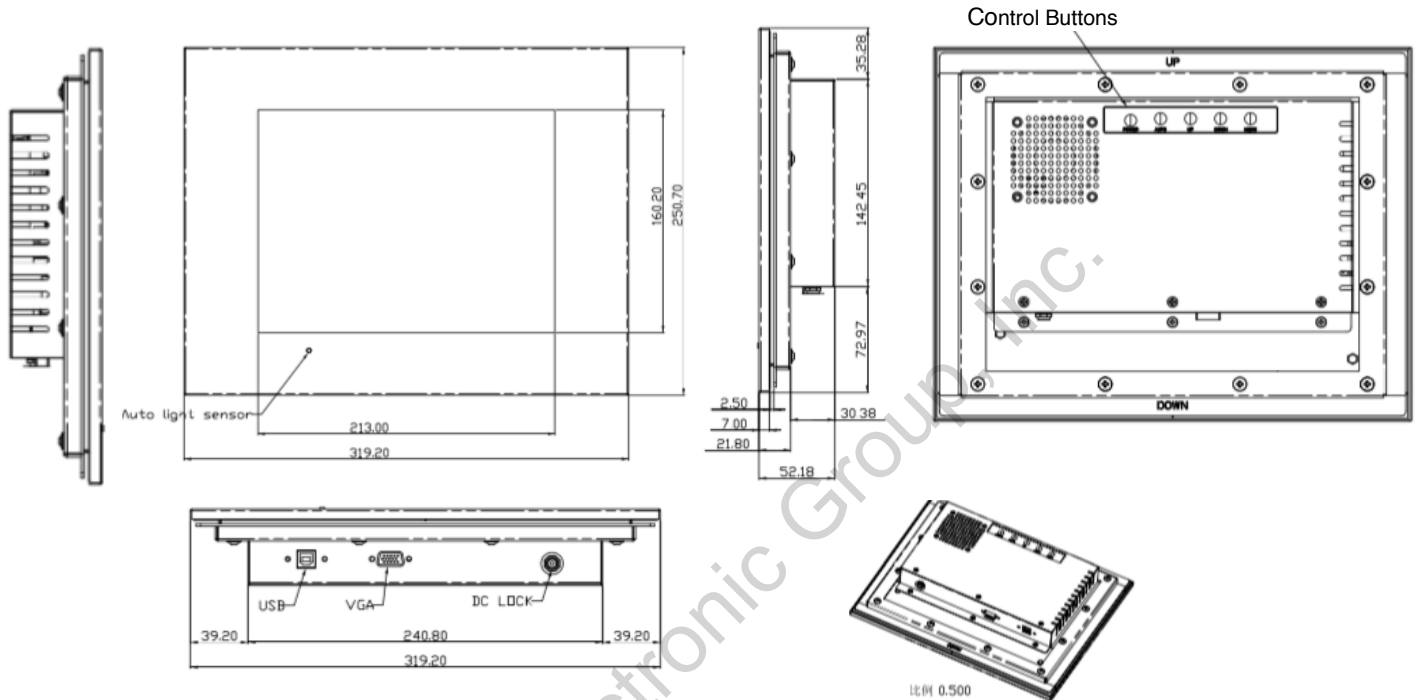

Standard Accessories:

- 90-240VAC Power Adapter
- VGA Cable

Available Options:

- DVI Input
- 1024 x 768 Resolution
- Touch Screen
- Private Label
- Other Customer - Specific Modifications

Aegis (888)687-6877
ELECTRONIC GROUP, INC