



SRMOB-10.4 Series

10.4" Sunlight Readable Optically Bonded Monitors

- Produces Clear, Sharp Images Even in Direct, Bright Sunlight
- 1,000 or 1,500 nits Brightness
- **Optical Bonding** Improves Image Quality
- **TRU-Tuff** Ensures Maximum Shock/Vibration Resistance
- Lockable OSD (On-Screen Display) Controls
- Auto Re-Start After Power Loss


The SRMOB-10.4 Series Sunlight Readable Optically Bonded LCD monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. They utilize state-of-the-art LED backlights to produce over 1,000 nits of brightness (vs. 250-300 nits for standard monitors). This results in amazingly bright, crystal-clear images, even with direct, bright sunlight on the face of the screen. The protective Anti-Reflective glass reduces external reflections. The Optical Bonding eliminates any internal reflections, and improves contrast ratio.

The SRMOB-10.4 Series Sunlight Readable Optically Bonded LCD monitors are built with industrial-grade components, and receive our exclusive **TRU-Tuff** treatment. The **TRU-Tuff** process includes: RTV silicone on all connections and critical components; all wires are dressed, tie-wrapped and secured; and ThreadLock on all screws. This, plus the rugged powder-coated steel enclosure, ensures maximum shock and vibration resistance. These monitors are ideal for a wide range of demanding applications including industrial, military, law enforcement, aviation, marine, inspection, surveying, cranes, oceanic, entertainment and transportation. **TRU-Vu** monitors are backed by our full 3-Year Warranty.

Specifications				
MODEL	SRMHXOB-10.4U	SRMHXOB-10.4B	SRMOB-10.4B	SRMOB-10.4S
LCD Panel	10.4" Color LCD; LED Backlights			
Resolution	1024 x 768 (XGA)		800 x 600 (SVGA)	
Viewable Area	8.31" (W) x 6.24" (H) (211.2 x 158.4 mm)			
Pixel Pitch	0.2055			
Display Colors	16.2M			
Aspect Ratio	4:3			
Brightness	1,500 nits		1,000 nits	
Contrast Ratio	3,000:1			
Viewing Angle	178° (H) x 178° (V)		160° (H) x 130° (V)	
Response Time	15 msec			
Control	OSD (On-Screen Display) via Front Panel Pushbuttons		OSD (On-Screen Display) via Rear Panel Pushbuttons	
Video Inputs	VGA, HDMI, Composite BNC Loop-Thru	VGA, Composite (BNC Loop-Thru); NTSC/PAL Auto-Recognition		VGA, S-Video, Composite BNC, NTSC/PAL, Auto Recognition
Power Requirement	12-24 VDC (2.5 mm Locking Barrel Plug)		12 VDC (2.1mm Barrel Plug); 90-240 VAC (via Included Power Brick)	
Power Consumption	16W			
Enclosure	Powder-Coated Steel			
Mounting	75 x 75 mm Rear VESA Hole Mounts			
Operating Temp.	-22° to +176° F (-30° to +80° C)			
Humidity	5 - 90% RH			
Shock	50G, 20ms, Half-sine wave			
Vibration	1.5G (10-200 Hz, P-P) 30 mins./axis (X,Y,Z)			
Dimensions	10.13" (W) x 7.96" (H) x 1.73" (D) (257.4 x 202.2 x 44 mm)			
Weight	3.86 lbs. (1.75 kg)			
Warranty	3 Years			

SRMOB-10.4 Series 10.4" Sunlight Readable Optically Bonded LCD Monitors

Dimensions: (mm)

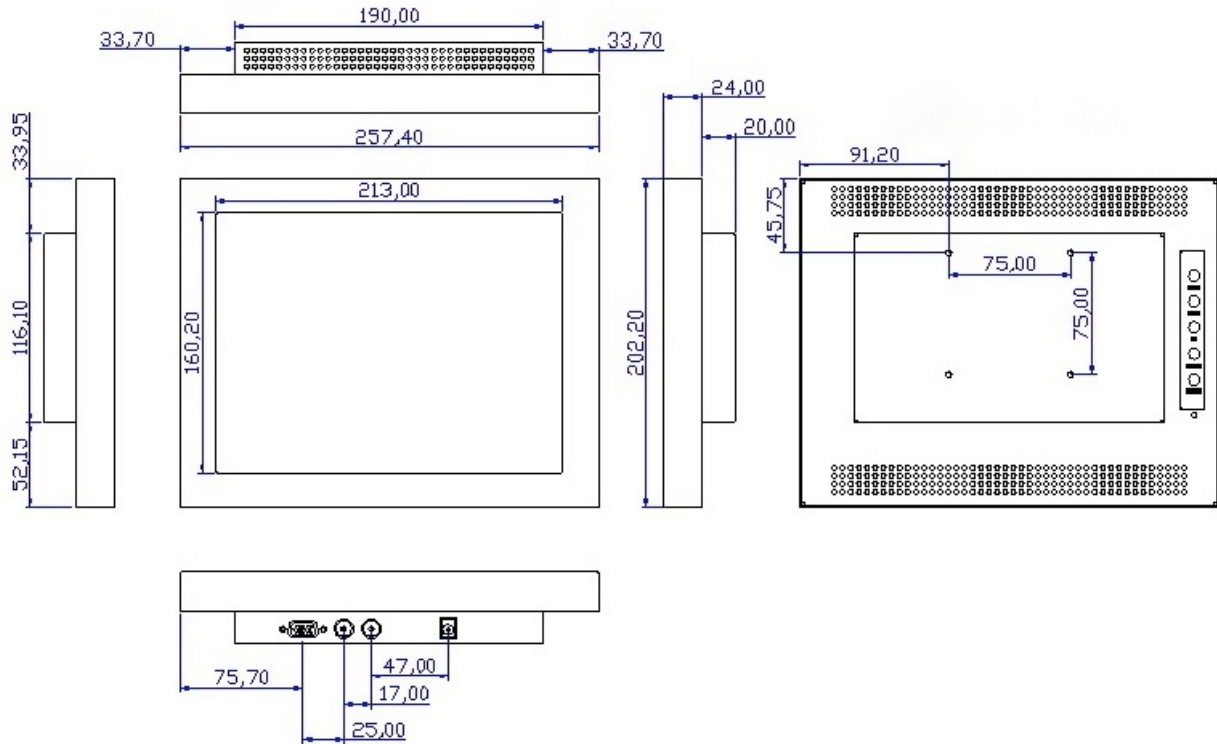

Standard Accessories:

- 90-240 VAC Power Brick - (SRMOB-10.4S and SRMOB-10.4B)
- DC Power Pigtail with Locking 2.5mm Connector (SRMHXOB-10.4U and SRMOB-10.4N2-36 only)

Available Options:

- Automated Ambient Light Sensor
- NEMA 4 Waterproof Enclosure
- Move OSD Control Buttons onto Front Bezel
- Dim-to-Black
- DVI Video Input
- Dual BNC Inputs
- 11-36 VDC Operation
- Panel Mount
- Private Label
 - Other Customer - Specific Modifications

TRU-VU Monitors, Inc.

925 E Rand Road
Arlington Hts, IL
60004

Aegis (888)687-6877
ELECTRONIC GROUP, INC

v0419

Specifications subject to change without notice.

For more information please contact Aegis Electronic Group, Inc. *(888)687-6877 *aegis-g2@aegiselect.com *http://www.aegiselect.com