



### SRM-17.3G

#### 17.3" Sunlight Readable Industrial-Grade LCD Monitor

- 1,000 nits Brightness
- Produces Clear, Sharp Images Even in Direct Bright Sunlight
- Full HD Resolution: 1920 x 1080 (1080p/60)
- Ambient Light Sensor Adjusts Screen Brightness Automatically
- Lockable On-Screen Display (OSD) Controls
- Auto Re-Start After Power Loss
- **TRU-Tuff** Ensures Maximum Shock/Vibration Resistance
- Can Be Customized to Meet Your Needs
- 3 Year Warranty

The SRM-17.3G Sunlight Readable monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. They utilize state-of-the-art LED backlights to produce over 1,000 nits of brightness (vs. 250-300 nits for standard monitors). This results in amazingly bright, crystal-clear images, even with direct, bright sunlight on the face of the screen. The SRM-17.3G Sunlight Readable monitors offer Full HD resolution; ideal for use in a wide range of demanding applications including industrial, law enforcement, aviation, marine, military, inspection, advertising, material handling (cranes) and transportation where viewability in direct bright sunlight is crucial.

All **TRU-Vu** industrial LCD monitors are specifically designed for use in demanding applications. Every **TRU-Vu** monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit [www.TRU-VuMonitors.com](http://www.TRU-VuMonitors.com) for more details.


### Specifications

MODEL	SRM-17.3G
LCD Panel	17.3" Color AHVA Panel; LED Backlights
Resolution	1920 x 1080 (1080P/60)
Viewable Area	15.03" (W) x 8.42" (H) (381.8 x 214.01mm)
Pixel Pitch	0.1989mm
Display Colors	16.2 M
Aspect Ratio	16:9
Brightness	1,000 nits
Contrast Ratio	600:1
Viewing Angle	160° (H) x 140° (V)
Response Time	40 msec TrF
Control	OSD (On-Screen Display) via Pushbuttons
Video Inputs	DVI, HDMI, DisplayPort
Power Requirement	12-24 VDC (Includes 2.5 mm Locking Pigtail)
Enclosure	Powder Coated Steel
Mounting	Rear 75 x 75 mm VESA Mount Holes
Operating Temperature	32° to 158° F (0° to 70°C)
Humidity	5-90% RH
Shock	50 G (20 msec, ½ sine)
Vibration	1.5G RMS 10-200 HZ
Dimensions	16.06" W x 10.23" H x 1.53" D (408 x 260 x 39 mm)
Weight	Approx. 10 Lbs.

### SRM-17.3G

#### 17.3" Sunlight Readable Industrial-Grade LCD Monitor

##### Dimensions:

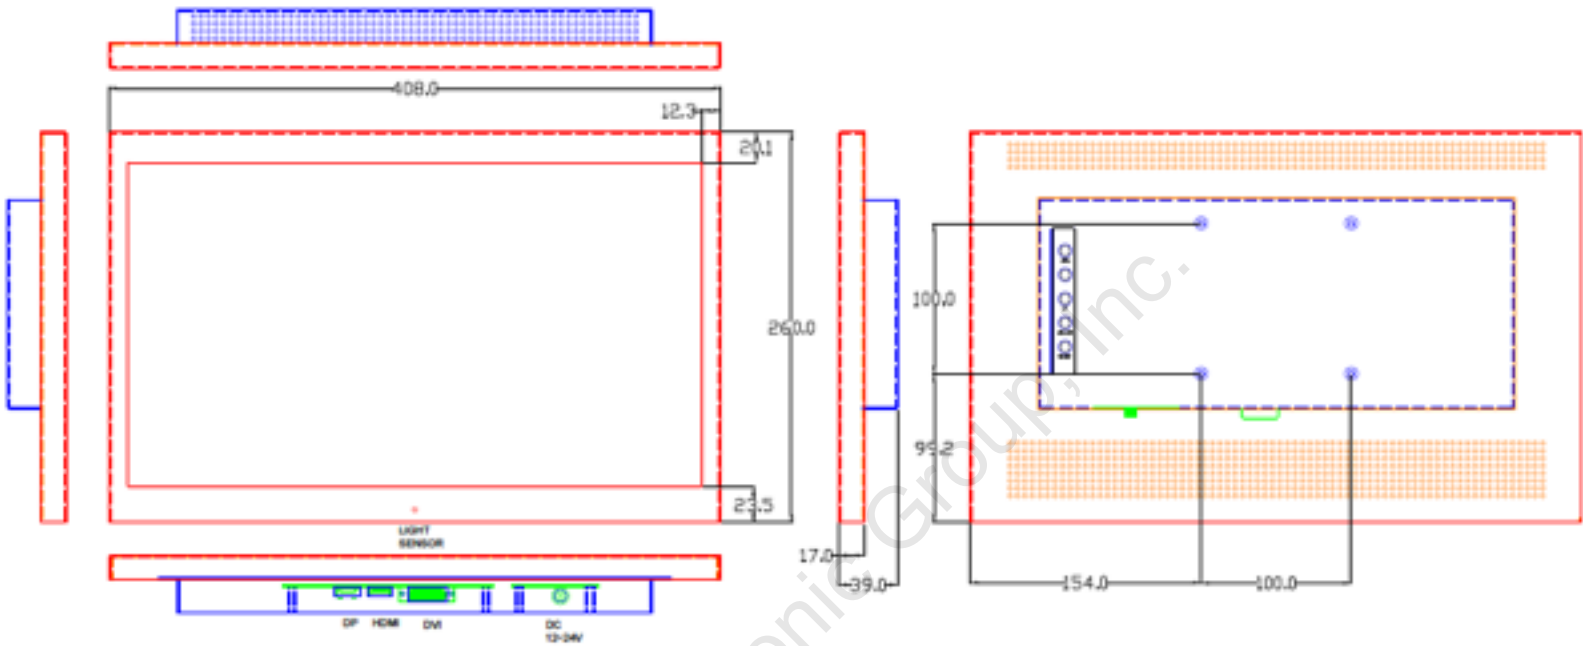

##### Standard Accessories:

- Power Pigtail Cable
- HDMI Cable

##### Available Options:

- Tabletop Base
- Waterproof NEMA 4 Enclosure
- Touch Screen
- Private Label

