


① IRIS CABLE

(+) RED	INPUT	VOLTAGE
(-) BLACK	GROUND	
WHITE	VIDEO SIGNAL	
GREEN	REMOTE CONTROL	

② MOTOR CABLE

(+) GREEN	FOCUS NEAR
(+) BLACK	FOCUS FAR
(+) YELLOW	ZOOM IN
(+) RED	ZOOM OUT

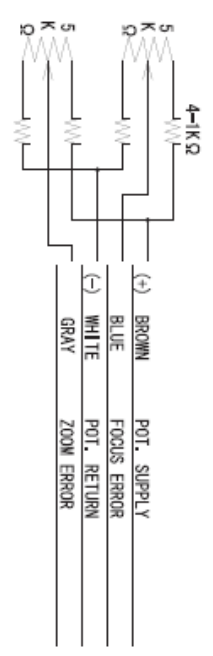


SPECIFICATION

1. USE	FOR 1/2" COLOR. B/W CAMERA
2. FOCAL LENGTH	f = 8 ~ 80 mm
3. IRIS RANGE	F = 1.8 ~ 360
4. IMAGE SIZE	φ 8 (4.8 × 6.4)
5. BACK FOCAL LENGTH	14.66 mm in air
6. FLANGE FOCAL LENGTH	17.526 mm in air
7. FOCUS RANGE	∞ ~ 1.2 m
8. FIELD ANGLE	DIA. (W) 53.6 ° (T) 5.8 ° HOR. 43.6 ° VER. 4.6 °
9. FIELD OF VIEW AT F.O.C.	VER. 33.0 ° DIA. 1133.6 mm HOR. 903.4 mm VER. 92.4 mm DIA. 626.6 mm HOR. 69.3 mm
10. DISTORTION	VER. -0.9% % FRONT +0.10 % REAR
11. LENS CONSTRUCTION	13 GROUPS 16 ELEMENTS
12. GEAR APERTURE	FRONT φ46 REAR φ14.2
13. EXIT PUPIL POSITION	FRONT -83.4 mm REAR φ14.2
14. WEIGHT	550 g (570 g) (format)

DC (DIRECT CONTROL)

DRIVE COIL	RESISTOR	190Ω (20' φ)
BRAKE COIL	RESISTOR	RED (+) 4p in BLACK 3p in YELLOW (+) 2p in GREEN 1p in
DRIVE VOLT.	OPEN	LESS THAN +4V
	CLOSE	OVER THAN 0V
		WINDING SPRING

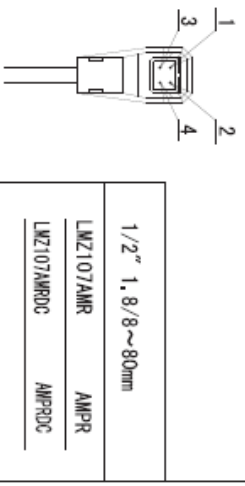

1/2" 1.8/8~80mm
LWZ107AMR AMPR
LWZ107AMRDC AMPRDC