


1'-32 UNF

① IRIS CABLE

DC (DIRECT CONTROL)	
DRIVE COIL	RESISTOR 190Ω (20° C) RED (+) BLACK
BRAKE COIL	RESISTOR 1150Ω (20° C) YELLOW (+) GREEN
DRIVE VOLT.	OPEN COLOR LESS THAN 44V OVER THAN 44V (INCLUDING SPRING)

② MOTOR CABLE

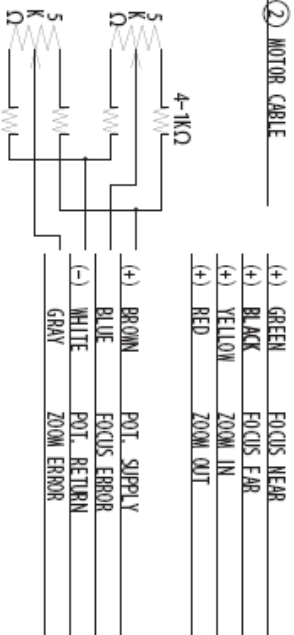

SPECIFICATION

1. USE	FOR 1/2" COLOR-B/W CAMERA
2. FOCAL LENGTH	f=10~250 mm
3. IRIS MAX. APERTURE	F= W1.5 T 2.2
4. IRIS RANGE	F=1.5~360
5. IMAGE SIZE	φ 8 (6.4x4.8)
6. BACK FOCAL LENGTH	12.93 mm in air
7. FLANGE FOCAL LENGTH	17.526 mm in air
8. FOCUS RANGE	∞~2.5 m
9. FIELD ANGLE	DIA. (W) 43.7° (T) 1.86°
	HOR. 35.3° VER. 1.49°
9. FIELD OF VIEW AT 10.0	DIA. 1427 mm 59.9 mm
	HOR. 1143 mm 48.1 mm
10. DISTORTION	TV VER. 857 mm 36.2 mm
	TV VER. -0.1% 0.36%
12. CLEAR APERTURE	FRONT φ108 REAR φ14.3 (format)
13. EXIT PUPIL POSITION	-175 mm
14. WEIGHT	2.3kg

MOTOR

INPUT VOLT	DC 6V~12V
ZOOM SPEED	approx 1.5sec/0/8
ZOOM CURRENT	max 25mA/0/8
FOCUS SPEED	approx 7.5sec/0/8
FOCUS CURRENT	max 25mA/0/8
OPERATE TEMPT	-10~+50°C

1/2" F1.5/10-250mm

LMZ250AMD C

LMZ250AMPDC