

MLH-10X

10X for 1/2 type Cameras, Macro Zoom C-Mount


Model No.	MLH-10X		Effective	Front	∅30mm
Max. Magnification	0.084mm - 0.84mm		Lens Aperture	Rear	∅6.6mm
Max. Aperture Ratio	1:5.6		Back Focal Length		23.29mm
Max. Image Format	6.4mm x 4.8mm(∅8mm)		Flange Back Length		17.526mm
Operation Range	Iris	F5.6 - F32C	Mount		C-Mount
	Focus	0.15m - 0.45m	Filter Size		M46 P=0.75mm
			Dimensions		∅48mm x 98.5mm
Control	Iris	Manual	Weight		260g
	Focus	Manual			
	Zoom	Manual			
Object Size(1/2 type CCD)	Working	152.4mm(6")	92.2mm - 9.6mm(D)	74.6mm - 7.8mm(H)	56.4mm - 5.9mm(V)
	Distance	457.2mm(18")	349.4mm - 34.6mm(D)	279.2mm - 28.0mm(H)	208.8mm - 21.2mm(V)
Object Size(1/3 type CCD)	Working	152.4mm(6")	70.1mm - 7.3mm(D)	56.4mm - 5.9mm(H)	42.4mm - 4.4mm(V)
	Distance	457.2mm(18")	261.6mm - 26.4mm(D)	208.8mm - 21.2mm(H)	156.2mm - 16.0mm(V)
Object Size(1/4 type CCD)	Working	152.4mm(6")	53.0mm - 5.6mm(D)	42.4mm - 4.4mm(H)	31.8mm - 3.4mm(V)
	Distance	457.2mm(18")	208.8mm - 21.2mm(D)	156.2mm - 16.0mm(H)	117.0mm - 12.0mm(V)
Angle of View	D	1/2 type	1/3 type	1/4 type	21.6° - 4.5°
	H				17.0° - 3.3°
	V				13.8° - 2.7°
					10.6° - 2.0°
					8.0° - 1.5°
Operating Temperature		-20°C - +50°C			

1/2
type

C

* For CS-Mount camera, please use 5mm adapter ring.
 M.O.D. : Minimum Object Distance

Dimensions

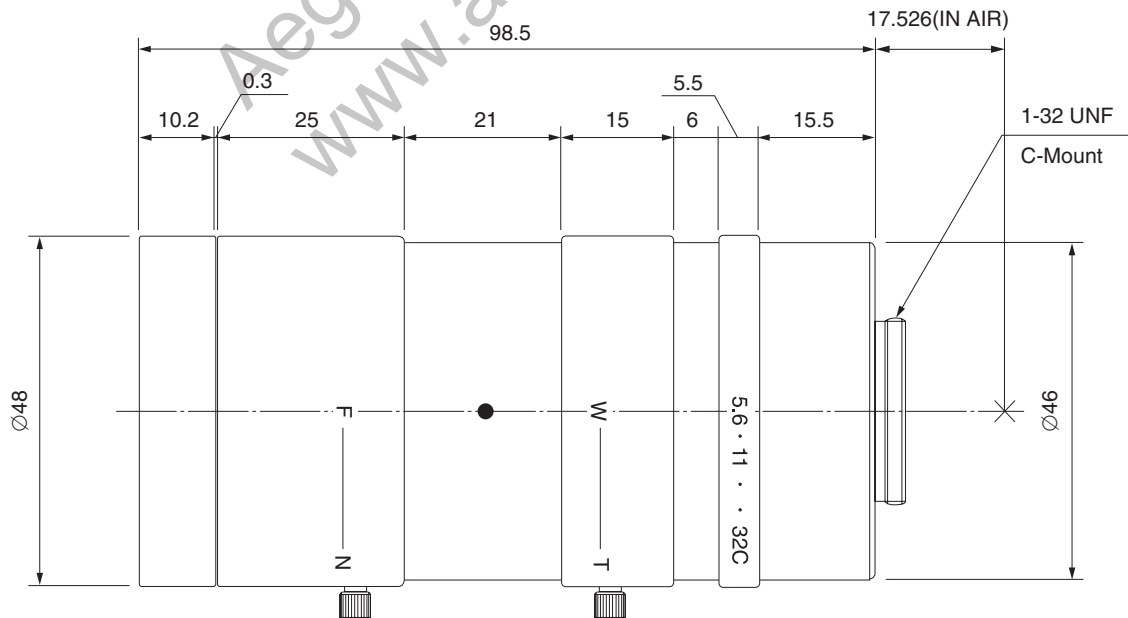

For More Information Please Call Aegis Electronic Group, Inc. * (888) 687-6877 Phone * aegis-g2@aegiselect.com * http://www.aegis-elec.com