



MODEL # **VZ-PVM-I1W4**

DISPLAY	
Screen Size	10.1"
Max. Resolution	1280 x 800 @60Hz
Pixel Pitch	0.1695mm x 0.1695mm
Brightness	300cd/m ² (Typical)
Contrast Ratio	1300:1
Aspect Ratio	16:9
Viewing Angle (H/V)	170° / 170°
Display Color	262K (RGB-6bit)
Response Time	< 25 ms
Frequency (H) / Frequency (V)	31 ~ 48KHz / 56 ~ 60Hz

INTERFACE	
RJ-45 for iP Camera & Power	1
USB / SD Card In (Media Player)	1 / 1

SPECIAL FEATURES	
Built-in Camera	1
Processing LED / Processing Text	YES / YES
Time & Date	YES
Multi-lingual Language	English, Spanish, French, German, Italian, Portuguese, Dutch

DIMENSIONS & WEIGHT	
Outline Dimension (W x H x D)	9.88" x 8.42" x 1.37" 261 x 214 x 34.8 mm
Box Dimension (W x H x D)	13.5" x 11.75" x 6.875" 342.9 x 298.45 x 174.625 mm
Net Weight / Gross Weight	4.35 lbs (1.97 kg) / 6.7 lbs (3.03 kg)

MOUNT	
VESA	75mm x 75mm, M4x10 Screws

GENERAL	
Transmitter - IR Remote Control	YES
Power Electrical Ratings Consumption	P.o.E. 30 W
Warranty Parts/ Labor MTBF (Approx.)	3 Year / 3 Year 50,000 Hours
Operating Temperature	32 - 104°F / 0 - 40°C
Regulation	cUL, FCC(A)
Compatible Mounts Wall Ceiling	VZ-WM05, VZ-WM11, VZ-AM01 VZ-CMKIT-01, VZ-CMKIT-02, VZ-CM06, VZ-CM18

VZ-PVM-I1W4 ADVANTAGES

- 10.1" IP Public View Monitor
- **Onvif Compliant (Fully Compatible with VMS) - Profile S**
- "A" Commercial Grade LED
- Built in 2.1 Mega Pixel Camera / Pinhole Lens
- Blinking Indicator LED(Blue, Red, Purple) / Blinking Message "Recording"
- Auto Power / Source Recovery / RJ-45
- PoE Support
- 3-Year Warranty




CAMERA	
Camera Type	2.1 Mega Pixel IP Camera
Image Sensor	Panasonic 2.1 Mega Pixel C-MOS Sensor
Lens	Megapixel Pinhole Lens
Total / Effect Pixel	1920(H) x 1080p(V) 30fps
Video Compression	H.264, CBR, VBR support
Video Out	1ch RJ-45 output
Motion Detection	Support
Ethernet Port	10 / 100 Base-T
Webclient Connection Protocol	TCP / IP
Support Protocol	IHTTP, TCP/UDP/IP, ARP, ICMP, RTP/RTSP, Multicast, Telnet, ftp, PPPoE, SMTP(e-mail), DHCP, NTP, uPnP, etc, ONVIF, PSIA support
Function	2D/3D NR, D-ZOOM, DPC, HLC/BLC, Defog D/N, DWDR, AGC, AWB, IR SMART
Dynamic IP	Dedicated dynamic IP service using www.ipcctvdns.com
MEDIA CARD	
External Storage VIDEO Format	Support SD/SDHC CARD, USB 2.0 HOST RM, RMVB, AVI, DVIX, MKV, MOV, HDMOV, MP4, M4V, PMP, AVC, FLV, VOB, MPG, DAT, MPEG, TS, TP, M2TS, WMV, H.264, H.263, WMV9, VC-1, MPEG1/2/4
VIDEO Resolution	1080P @60Hz
AUDIO Format	MPEG1/2/4, MP3, WMA, OGG, AAC, FLAC, APE, AC-3, DTS, ATRA, WAV, PCM
Image Format	JPEG, TIF, PNG, BMP
VIDEO Play Control	AUTO, REPEAT, ZOOM, RESUME, TIME


Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com
- Specification subject to change without notice.

DIMENSIONS

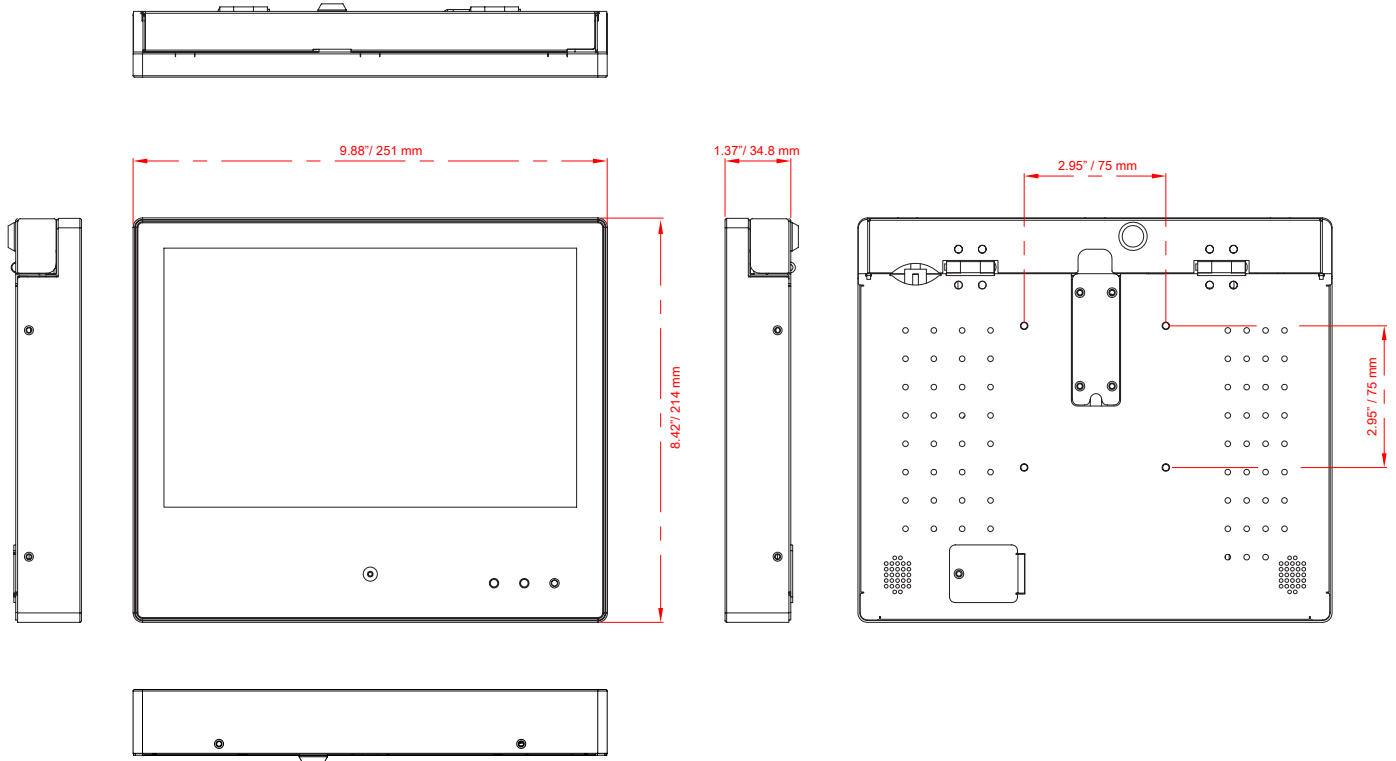

INTERFACE

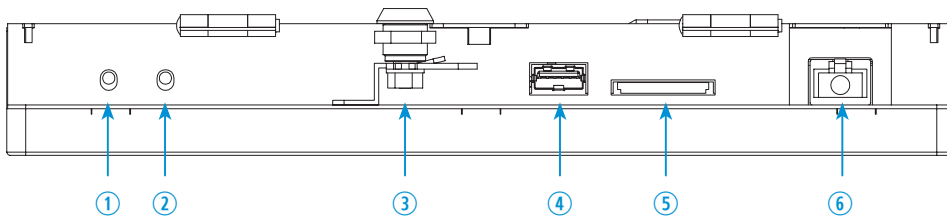

1. POWER ON/OFF
2. IP CAMERA RESET
3. KEY LOCK
4. USB IN (USB2.0)
5. SD CARD IN
6. ETHERNET 10/100

Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com
- Specification subject to change without notice.