




VZ-22CMP

HYBRID PROFESSIONAL LED CCTV MONITOR




VZ-22CMP ADVANTAGES

- 21.5" Full HD Resolution
- 3D Comb-filter, De-Interlace
- 16:9 / 4:3 Ratio Available, HDMI, VGA, PC Audio, AV Audio
- 1 Hybrid BNC (AHD2.0 / HD-TVI / HD-CVI) Input / Output (Loop-through)
- 1 BNC (CVBS) Input / Output (Loop-through)
- Built-in Speakers, Auto Source & Power Recovery
- 3-Year Warranty

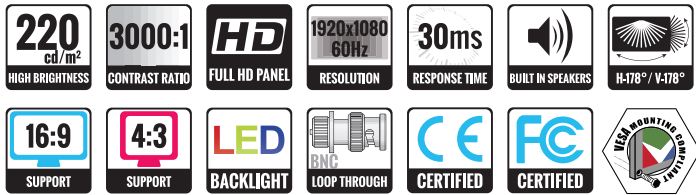


DIMENSIONS

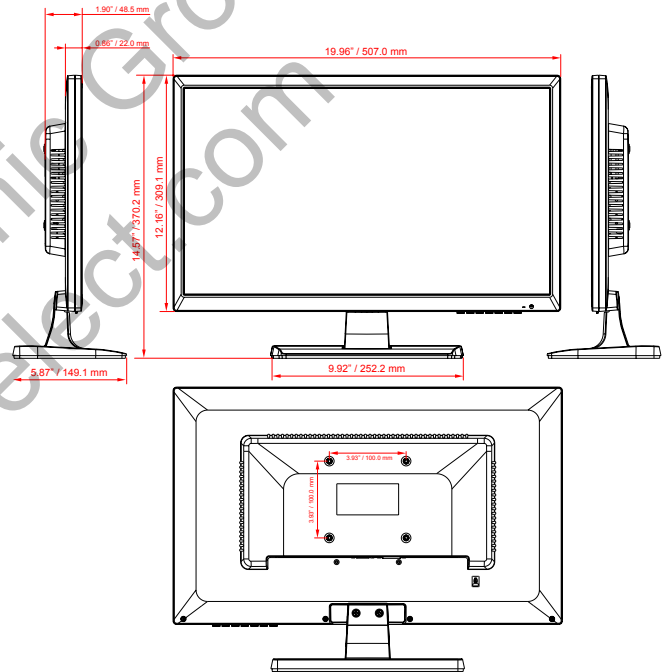

MODEL #		VZ-22CMP
VIDEO		
Screen Size	21.5"	
Max. Resolution	1920 x 1080 @60Hz	
Pixel Pitch	0.24795 mm x 0.24795 mm	
Brightness	220cd/m ² (Typical)	
Contrast Ratio	3000:1	
Aspect Ratio	16 : 9	
Viewing Angle (H/V)	178° / 178°	
Display Color	16.7 Million	
Response Time	< 30ms	
Video System	NTSC / PAL	
INTERFACE		
BNC (AHD, TVI, CVI) In / Out	1 / 1	
BNC (CVBS) In / Out	1 / 1	
VGA In (15Pin D-Sub)	1	
HDMI In	1	
PC Audio In / AV Audio In	1 / 1	
AUDIO		
Built in speaker	3W X 2	
SPECIAL FEATURES		
Filter Type	3D Comb-filter / De-Interlace	
Hybrid Input - AHD, TVI, CVI	Support	
Language	English, Deutsch, French, Spanish, Italian	
DIMENSIONS & WEIGHT		
Outline Dimension (W x H x D)	19.96" x 14.57" x 1.90" 507.0 mm x 370.2 mm x 48.5 mm	
Net Weight / Gross Weight	9.92 lb (4.5 kg) / 11.46 lb (5.2 kg)	
MOUNT		
VESA	100mm x 100mm (M4 x L8 screws)	
GENERAL		
Power	Electrical Ratings	DC 12V, 3A (AC 100-240V, 50/60Hz)
	Consumption	26 W
Operating Temperature Humidity		14 ~ 122°F / -10 ~ 50°C 20 ~ 70% RH
Regulations		FCC(A), CE, RoHs
Compatible Mounts		WALL: VZ-WM05, VZ-WM11, VZ-AM01, VZ-AM02 CEILING: VZ-CMKIT-01 RACK: VZ-RMK08

INTERFACE

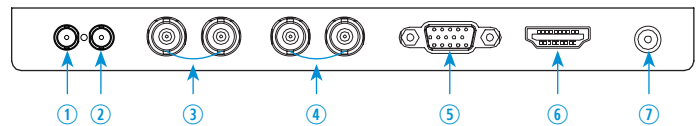

1. PC Audio IN
2. AV Audio IN
3. BNC(AHD, TVI, CVI) IN / OUT
4. BNC (CVBS) IN / OUT
5. VGA IN
6. HDMI IN
7. DC12V IN