

# EL6Z0915UCS-MPWIR

## 6X 9mm - 50mm F1.5 Day & Night

**for 1/1.8 type Megapixel Cameras, Motorized Control Vari-focal  
USB interface, CS-Mount**

### Optical Specifications


Model No.		EL6Z0915UCS-MPWIR		Min. Objective Distance		3m from front of lens	
Focal Length		9mm - 50mm		Effective Lens Aperture		Front:φ44.7mm Rear:φ9.6mm	
F-Number	Wide	F1.5 - F16C		Back Focal Length	Wide	9.2 mm (in Air)	
	Tele	F1.6 - F16C			Tele	9.2 mm (in Air)	
Max. Image Format		7.1mm x 5.4mm (φ8.9mm)		Flange Back Length		12.5mm (In Air)	
Angle of View	Diagonal	1/1.8 type	52.5° ~ 10.2°	1/1.8 type (4:3)	52.5° ~ 10.2°	1/2.7 type (16:9)	39.4° ~ 7.7°
	Horizontal	(16:9)	46.1° ~ 9.0°		42.3° ~ 8.2°		34.5° ~ 6.7°
	Vertical		26.3° ~ 5.2°		32.4° ~ 6.3°		19.5° ~ 3.8°
	Diagonal	1/2.8 type	38.5° ~ 7.5°	1/3 type (4:3)	35.9° ~ 7.0°		
	Horizontal	(16:9)	33.7° ~ 6.6°		28.8° ~ 5.7°		
	Vertical		19.1° ~ 3.8°		21.7° ~ 4.3°		

### Mechanical & Electrical Specifications

Control Interface		USB2.0	Dimensions	As per the attached drawing
Power mode		Bus power (500mA)	Mount	CS mount
Connector		USB TypeA	Weight	299g
Operating Temperature		-20°C - +60°C	Tripod Screw	1/4 -20UNC
Control	Iris	Motorized	Filter thread	*M67xP0.75 (With VM0918)
	Focus	Motorized		
	Zoom	Motorized		

(\*)For using filters, please attach VM0918 (Sold Separately).

### Dimensions

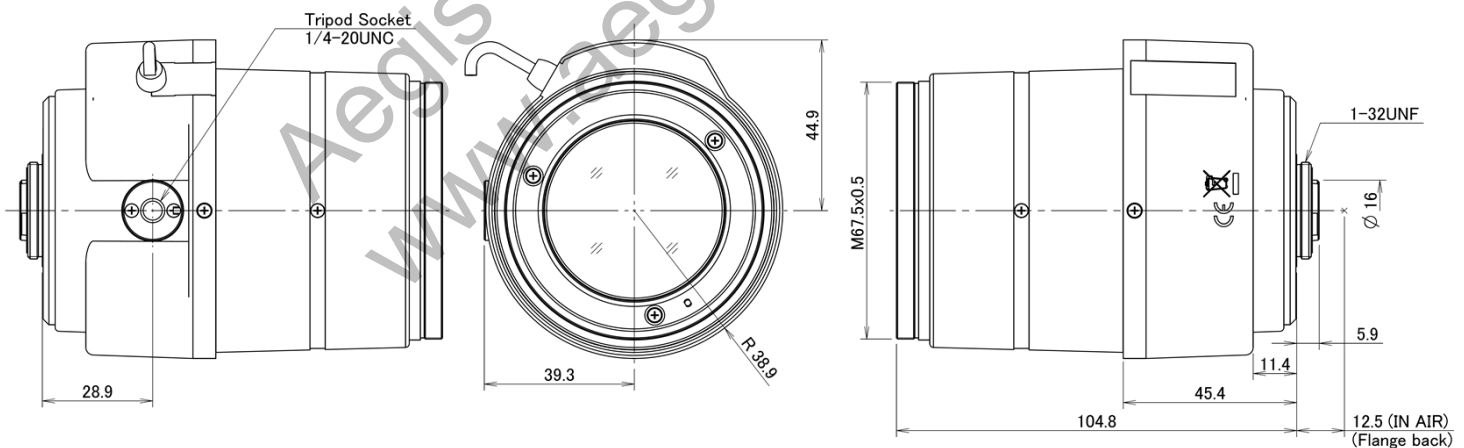

### Length of Wire

300±20 (mm)

This specification is subject to change without any notice.

2022.01