


4 IN 1 Camera

KTC-MS2502xB

- Sony 1/2.8" 2.13MP Progressive Scan STARVIS CMOS • 1080p(1920x1080)@30(25)fps
- 4in1 Output(AVI, TVI, CVI, CVBS)
- Fixed lens 3.6mm
- Electronic Day&Night
- WDR, 3D DNR, Defog
- UTC function supports OSD Control
- 25mm Mini Square Camera


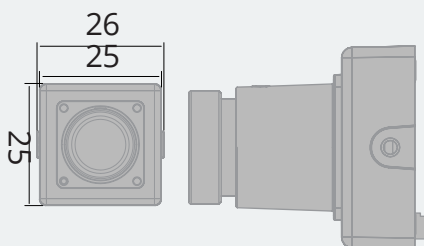


4 IN 1 Camera

KTC-MS2502xB

Dimensions

Unit : mm



Specifications

Image Sensor	1/2.8" Progressive Scan SONY STARVIS CMOS	Privacy Mask	16 Zones
Effective Pixels	1945(H) x 1097(V)	Image Rotation	OFF/H-FLIP/V-FLIP/HV-FLIP
Max. Video Resolution	TVI, AVI, CVI : 1080p@30(25)	Defog	OFF/ON(AUTO/MANUAL)
	fps/720p@60fps(50fps)/	Sharpness	0~10
	720p@30fps(25fps)	OSD control	Cable JOYSTIC, UTC
	TV out: CVBS(720H) NTSC/PAL	Language	ENGLISH,Русский, ESPAÑOL, DEUTSCH, FRANCAISE, PORTUGUÊS, 日本語, 한국어
Type	Fixed lens	Video Output mode	AVI, TVI, CVI, CVBS
Lens Focal Length	3.6mm, F 2.0	General	
Angle of View	112.3(D)x93.7(H)x49.3 (V)	IP Rating	-
Min.Illumination	0.2Lux(F2.0, AGC33dB, DSSx2)	Operating Temperature	-10°C~+50°C
IR LEDs	-	Storage Temperature	-20°C~+60°C
IR Range	-	Dimension(mm)	25X25mm
White Balance	AUTO/AUTO EXT/PUSH LOCK/MANUAL	Weight	Approx.21.5g
Dynamic Range	WDR/BLC	Power Source	12VDC(±10%)
	D-WDR	Power Consumption	Max.110mA@12VDC
	Level	Option	
Electronic Shutter Speed	AUTO/FLICKER/MANUAL/(1/30(25)~1/30,000)	Power Source	-
Digital Slow Shutter(DSS)	OFF~ x32	Power Consumption	-
Auto Gain Control(AGC)	OFF~45dB	Lens	KTC-MS2502xP4: 4.3mm Cone Pinhole Lens
Day&Night	AUTO/COLOR/B&W (Electronic D&N)		
Noise Deduction	3D-DNR(OFF/LOW/MIDDLE/HIGH)		
Motion Detection	OFF/ON(4 Zones)		