

IP Network Camera

2MP IP Starlight WDR Mini Bullet

IMB219-F4W

2MP IP True WDR Mini Bullet Camera with Board Lens

- 1/2.8" 2.9 μ m Pixel Progressive Sony Starvis CMOS
- Sensor 2MP (1920 X 1080) Max. 30fps
- 19 \varnothing mm Bullet Miniature Water-proof Housing
- 4mm Mega Lens (Lens Options are Available)
- WDR, DSS(Sens-up), 3DNR Supported
- Onvif Ver. 17.06 Compatible
- Supported Video Codec: H.264, MJPEG
- Built-in POE Cable
- IR Cut Filter
- Optional Ring Mount
- PoE Cable
- Made in Korea
- NDAA Compliant

Lens Options

3.6mm
4mm

*Lens and cable can be customized up on request




IP Network Camera

2MP IP Starlight WDR Mini Bullet



2MP IP True WDR Mini Bullet Camera with Board Lens

General Feature Diagram (mm)

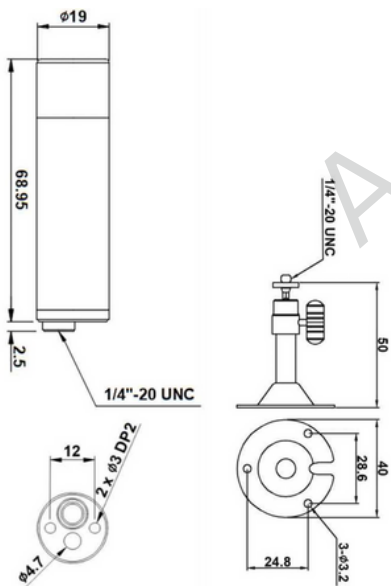

Technical Specification

Image	Image Sensor	1/2.8"(D-6.46mm) 2.12M Sony CMOS Sensor
	Size	1/2.8 inch
	Sensitivity	0.1Lux, 0.003Lux (DSS on)
	Total Pixels	2.16MP [1,945(H)x1,109(V)]
	Effective Pixels	2.12MP [1,937(H)x1,097(V)]
Function	Day & Night	Auto / Day(Color) / Night(BW), ICR Control
	Privacy Area	On/Off (16 Programmable Zones)
	Motion Detection	432 Zone, Sensitivity 1~5 Step, On/Off
	Ext. Video	CVBS 1.0Vp-p, (75Ω)
	WDR	True WDR, On/Off
	DNR	2D DNR, 3D DNR - HDR
	Defog	Detects Foggy, On/Off
	Elec. Shutter	1/25(30)~1/30,000sec
	Color Adjust	Bright / Contrast / Saturation / Sharp / Hue
	White Balance	Auto(Indoor) / Auto(Outdoor) / Push / User
	OSD Display	Via Webpage Viewer
	Image Mirror	Normal / Mirror(H) / Flip(V) / Both(HV)
	Electrical	Power Supply
Environmental	Temperature	Working Temp: 32°F ~ 122°F (0°C ~ +50°C) / Preservation Temp: 14°F ~ 140°F (-10°C ~ +60°C)
	Interface	RJ45 10/100 Base-T PoE
Network	Protocol	TCP/IP, UDP/IP, RTP, RTSP, RTCP, NTP, HTTP, DHCP, FTP, SMTP, DNS, DDNS, Onvif 17.06 Compatible
	Onvif	The Latest Version
	Simultaneous Access	Max. 3 Users
	FTP Uploading	MJPEG Still Image
	Video Compression	H.264 (High, Main, Base Line Profile), MJPEG
Video	Resolutions	1920x1080/1280x1024/1280x960/1280x720/1024x768/640x480/320x240
	Frame Rate	30fps @ All Resolution
	Video Streaming	Simultaneously H.264 and MJPEG, Independent Frame Rate and Bandwidth Control, VBR/CBR Mode
	Video Quality	H.264: Bitrate Control / MJPEG: Quality Level Control
Software	Client Software	Built-in Web, Onvif Compatible 3rd Party VMS
Web Browser	OS / Manager / Viewer	OS: Windows7,8,10, MAC / Manager: Internet Explorer 11 or higher, Chrome, Firefox, Safari, Opera
Event	In / Out	In: Trigger / Network Loss / Tampering / Motion, Out: FTP
System	OS	Embedded Linux
Physical Spec	Dimension	19Ø (Bullet Diameter) x 71.45(L)
	Lens	3.6mm (Options are Available)
	Mount	Optional Ring Mount