


## VZ-215D2IP-L ADVANTAGES

- Streams what's on the **Screen**
- Perfect for **Employee Monitoring**
- Streams like a **Camera** via Ethernet 10/100
- Easy "**Story-Boarding**" for Loss Prevention
- Support HDMI Resolution 480p / 720p / 1080p / 4K
- 21.5" LED Grade **A** Commercial Panel
- Assignable Control Buttons
- Built to run 24/7/365




MODEL #		VZ-215D2IP-L
<b>DISPLAY</b>		
Screen Size	21.5"	
Max. Resolution	1920 x 1080 @60 Hz pixel	
Pixel Pitch	0.2482(H) x 0.2482(V) mm	
Brightness	250cd/m <sup>2</sup> (Typical)	
Contrast Ratio	1000 : 1	
Aspect Ratio	16 : 9	
Viewing Angle (H/V)	170° / 160°	
Display Color	16.7 Million	
Response Time	5 ms	
<b>INTERFACE</b>		
Ethernet 10/100	1 (Up to 1080p)	
HDMI (1.4) In	1 (Up to 4K)	
USB (Upgrade)	1	
<b>FEATURES</b>		
Webclient Connection Protocol	Win 10, 8, 7, Vista, XP, Win CE, Chrome, IOS, Linux, TCP/IP	
Support Protocol	TCP/IP, UDP, RTSP, ONVIF 2.4, HTTP, DNS, RTMP, TS, DHCP	
Video compression	Video coding	H.265 & H.264
	Audio coding	AAC,G.711U, G.711A; sampling rates : 48000kHz
	Steaming type	(CBR & VBR), Adjustable: 64kbps-12Mbps
	Steaming Size	Main streaming: 1920*1080, 1280*960 1280*960, 1280*800, 1280*720 Sub streaming: 1280*720
<b>AUDIO</b>		
Built in Speaker	x 2	
<b>WEIGHT &amp; DIMENSIONS</b>		
Outline Dimension (W x H x D) (inch)	20.32 x 12.99 x 1.72	
(W x H x D) (mm)	516 x 330 x 43.6	
Net Weight	3.5 Kg ( 8.48 lbs )	
<b>MOUNT</b>		
VESA	100 mm x 100 mm / M4 x 10 mm	
<b>GENERAL</b>		
Power	- Electrical Ratings	DC 12V/2.1A (AC100 ~ 240V[50/60Hz])
	- Consumption	25 W
Operating Temperature	32 ~ 122°F / 0 ~ 50°C	
Storage Temperature	-4 ~ 140°F / -20 ~ 60°C	
Operating Humidity	0 ~ 90% RH	
Compatible Mounts	- WALL	VZ-WM05, VZ-WM11, VZ-AM01
	- CEILING	VZ-CMKIT-01, VZ-CMKIT-02
	- RACK	VZ-RMK 08
Package Include	Monitor x1, HDMI Cable x 1, Manual x1, 12V/4A Power Adapter x1	

## DIMENSIONS

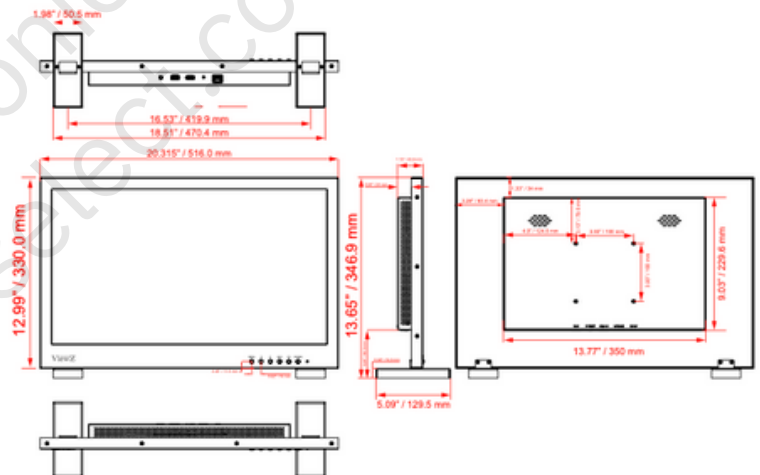


## INTERFACE

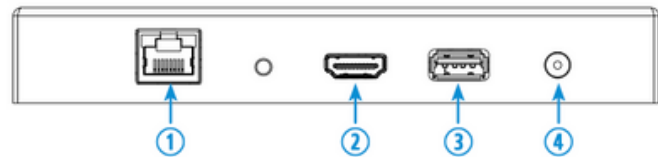

1. ETHERNET 10/100 (RJ 45)
2. HDMI IN
3. USB (Upgrade)
4. DC 12V IN

## STORYBOARDING

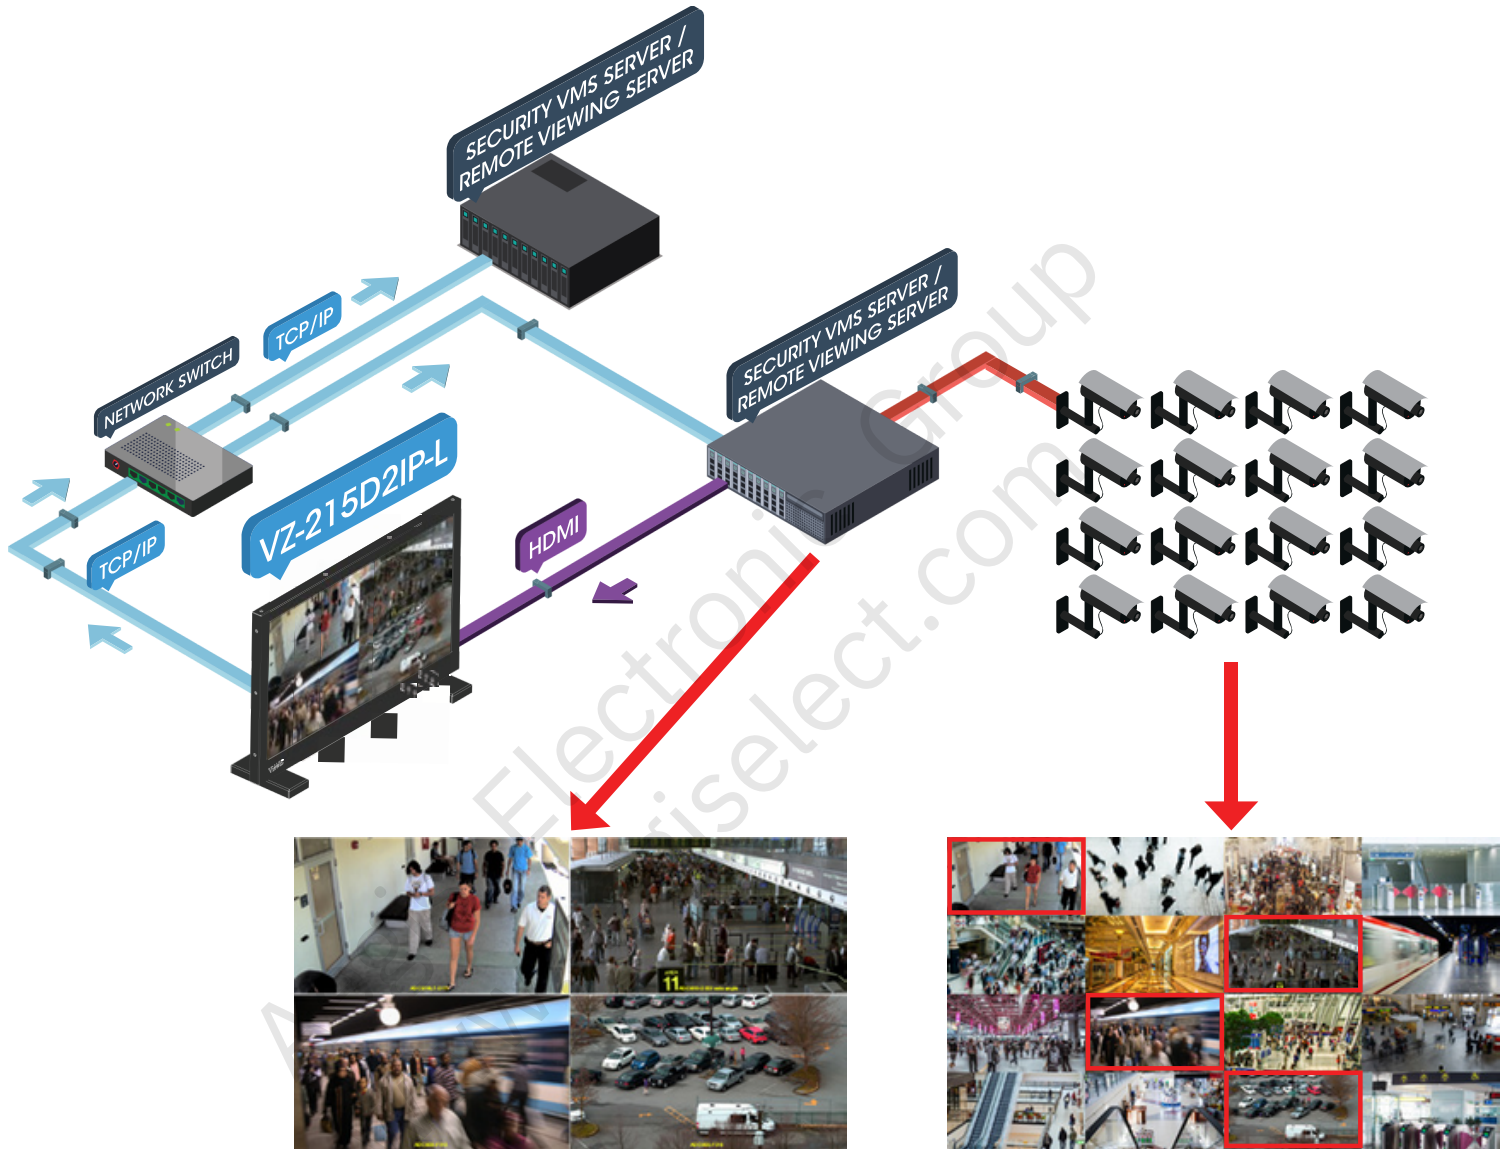

Make a single view at the DVR/NVR and send this view to VZ-215D2IP-L

Want to pick 4 camera inputs and save it as a single channel record

### STEP 1

- Connect **VZ-215D2IP-L** to security VMS server or remote viewing server. It connects just like a typical monitor via HDMI connection.
- Then, run an Ethernet cable from **VZ-215D2IP-L** to the network switch to connect it to your network.
- Assign an IP address to **VZ-215D2IP-L** and then enroll that IP address on your VMS as an IP camera channel so that **VZ-215D2IP-L** can stream and record to your VMS.

For More Information Please Call Aegis Electronic Group, Inc. \*CA- (760) 729-2026 AZ- (480) 635-8400 \* aegis-g2@aegiselect.com \* <http://www.aegis-elec.com>

