

VC-5/9/18MC Series

5/9/18 Megapixel High Speed CMOS Digital Camera



The VC-5/9/18MC cameras, the latest model of the industrial proven VC series, are new 5/9/18-megapixel cameras with the Camera Link interface.

The VC-5/9/18MC cameras use the latest CMOS global shutter image sensor(GMAX 2505, 2509, 2518) technology from Gpixel. In the case of the VC-5MC-120I camera, it offers up to 120.6 frames per second at $2,592 \times 2,160$ resolution. These combinations of high resolution, high speed and global shutter set a new standard for industrial, scientific and surveillance digital imaging applications. Equipped with the Vieworks' innovative technologies proved by world's top FPD manufacturers, the VC-5/9/18MC cameras offer not only highly uniformed images but also high speed image processing capabilities. Featured with high quality image uniformity and high resolution, this camera is ideal for wide range of demanding applications such as FPD, PCB and semiconductor inspections.

VC-5/9/18MC Series

5/9/18 Megapixel High Speed CMOS Digital Camera

Main Features

- High Speed 5/9/18 Megapixel CMOS Image Sensor
- Camera Link Full Interface up to 120.6 fps
- Power over Camera Link (PoCL)
- Global Shutter CMOS Technology
- DSNU and PRNU Correction
- Flat Field Correction
- GenICam Compatible – XML based Control

Applications

- Flat Panel Display Inspection
- Electronics Inspection
- Semiconductor Inspection
- Document / Film Scanning
- Factory Automation, Robotics or AOI

Specifications


Model	VC-5MC-M/C120	VC-9MC-M/C90	VC-18MC-M/C45
Resolution (H × V)	2,600 × 2,160	4,200 × 2,160	4,504 × 4,096
Sensor	Gpixel GMAX2505	Gpixel GMAX2509	Gpixel GMAX2518
Sensor Size (Diagonal)	6.5 mm × 5.4 mm (8.45 mm)	10.5 mm × 5.4 mm (11.8 mm)	11.27 mm × 10.24 mm (15.22 mm)
Sensor Type	High Speed CMOS Image Sensor		
Pixel Size	2.5 μm × 2.5 μm		
Interface	Camera Link Base / Medium / Full / 10 Tap, 26-pin SDR Connector		
Max. Frame Rate	2 Tap: 29.7 fps 4 Tap: 58.7 fps 8 Tap: 114.6 fps 10 Tap: 120.6 fps	2 Tap: 18.4 fps 4 Tap: 36.5 fps 8 Tap: 72.0 fps 10 Tap: 90.7 fps	2 Tap: 9.1 fps 4 Tap: 18.0 fps 8 Tap: 35.6 fps 10 Tap: 44.9 fps
Exposure Time (1 μs step)	1 μs – 60 s		
Partial Scan (Max. Speed)	11695.9 fps at 2Lines (10 Tap)	8796.2 fps at 2Lines (10 Tap)	6172.8 fps at 2Lines (10 Tap)
Pixel Data Format	Mono Color	Mono 8 / 10 / 12 GB Bayer 8 / 10 / 12	
Electronic Shutter	Global Shutter		
Digital Gain	1 × ~ 32 ×		
Black Level Control	0 – 255 LSB at 12 bit (1 LSB step)		
Exposure Mode	Free-Run, Timed, Trigger Width		
External Trigger	3.3 V ~ 24.0 V, 10mA, Logical Level Input Optically isolated, CC1		
Software Trigger	Asynchronous, Programmable via Camera API		
Dynamic Range	65 dB		
Dimension / Weight	40.0 mm × 40.0 mm × 51 mm, 130 g (C-mount)		
Temperature	Operating: 0°C ~ 40°C, Storage: -40°C ~ 70°C		
Lens Mount	C-mount		
Power	11 ~ 24 V DC, Typ. 6 W, PoCL supported		
Compliance	CE, FCC, KC		

VC-5/9/18MC Series


5/9/18 Megapixel High Speed CMOS Digital Camera

Spectral Response


VC-5/9MC

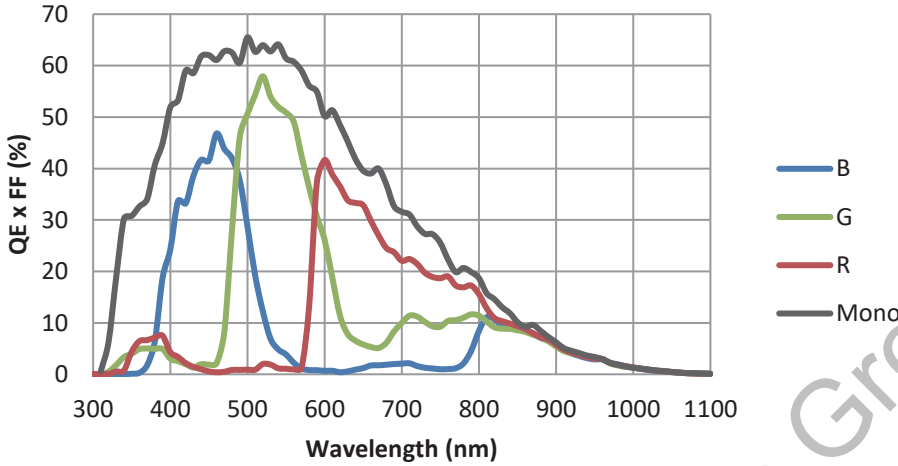

VC-18MC

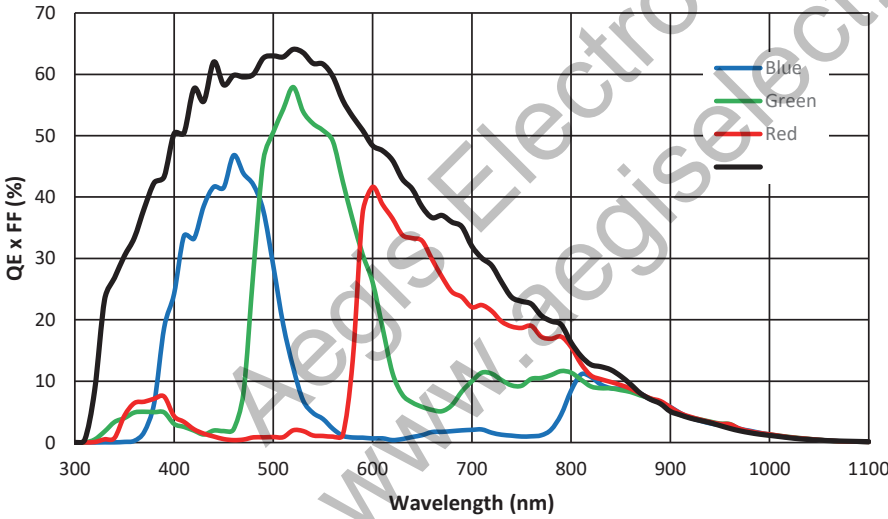


Ordering Scheme

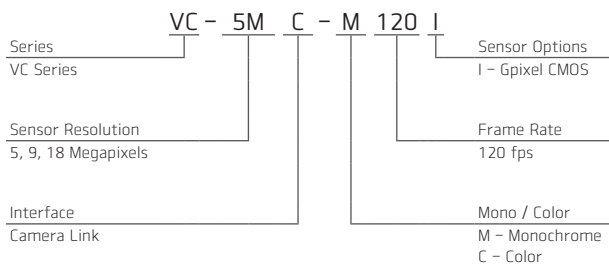

Connector Specification

Power / Control



- 1: +12V DC
- 2: Trigger IN+
- 3: Trigger IN-
- 4: Output+
- 5: Output- (HR10A-7R-6PB)
- 6: DC Ground

Connectors on camera body

VC-5/9/18MC Series

5/9/18 Megapixel High Speed CMOS Digital Camera

Mechanical Dimensions

Unit: mm

