




## IMHD-22HVBN

21.5" Full HD 1920 x 1080 LED Monitor HDMI, VGA, Looping BNC Inputs & Outputs, Built for 24/7 Performance

### Features

- Built for 24/7 performance, ensuring continuous, reliable video surveillance for critical security environments
- Portrait Mode Support
- Full High Definition Quality: 1920 x 1080
- Bright LED Illuminated Panel
- Inputs: HDMI, VGA, BNC
- Outputs: BNC
- 16.7 Million Color Capacity
- VESA Mount 100x100

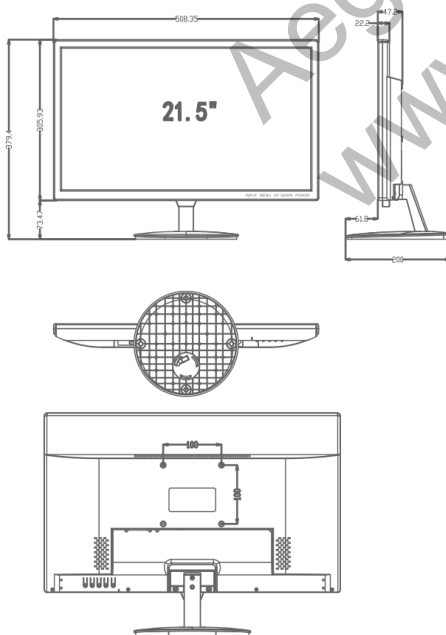

Display	
Screen diagonal dimension	21.5 inch
Viewable area W x H	18.7 x 10.5 in
LED Type	LED
Pixel Pitch (H x V)	0.248 x 0.248
Screen Maximum Resolution	1920x1080
Supported input Resolutions	720x400; 640x480; 800x600; 1024x768; 1280x1024; 1920x1080
Refresh Rate (Vertical Frequency)	60 Hz depending on resolution
Color Depth	8 bits;16.7 Million colors
Brightness	200 cd/m
Auto Adjust	Yes
Monitor Aspect Ratio	16:9
Display Aspect Ratio	OSD selectable16:9 or 4:3
Horizontal TV Lines	1080
Contrast Ratio	1000:1
Response Time(ms)	5
View Angle H/V(degrees)	176°/176°
Digital Video Inputs	HDMI up to 1920x1080
Port inputs	HDMI+VGA+BNC+USB(firmware update)
Port outputs	BNC
Speakers	N/A
OSD Languages	English, Spanish, German, Chinese, French, Italian
Dimension size	20 x 12 x 1.9 in (508*305*47mm)
Max Dimensions Monitor + Stand (W x L x D)	20.14 in x 14.61 in x 6.34 in
Case & stand material	Plastic
VESA Mounting Pattern	location centered on monitor body 100x100
Base/Stand included	Yes
Net Weight	6.2 lbs (2.8kg)
Gross Weight	8.4 lbs (3.8kg)
Power- Watts(on and standby)	< 25W
Power input	100 ~ 240V AC
Operating Temperature	32°F ~ 104°F (0°C ~ 40°C)
Storage Temperature	-4°F ~ 140°F(-20°C ~ 60°C)
Operating Humidity	10 ~ 85%
Certifications	CE, FCC certificates

### Ordering Information

**IMHD-22HVBN: 21.5" HDMI Monitor**