



## PAR-P4PTZXIR2812NH-AIWL


4 Megapixel IP Plug & Play, Outdoor PTZ, 2.8-12mm Motorized Auto-Focus, Up to 164' IR Range, Flashing White Deterrent Light and/or Siren, WDR, Built-in Mic + Speaker, SD Card Slot, 12VDC/PoE+

### Features

- True AI Human and Vehicle Classification for Line Crossing and Intrusion Detection
- Flashing White Deterrent Light and/or Siren: AI Triggered
- 4 Megapixel Resolution
- Motorized Auto-Focus 2.8-12mm Lens
- True Day/Night with IR Range up to 164'
- Smart IRs
- H.265+, H.265, H.264+, H.264, MJPEG
- 30 FPS Recording and Live
- True WDR 120dB
- Micro SD Slot: Up to 256GB
- Audio Input: Built-in Mic
- Audio Output: Built-in Speaker
- 12VDC/PoE++ Operation
- ONVIF
- Free iOS & Android Apps for Smart Phones & Tablets
- Free Central Management Software (CMS)
- Free MAC Client
- NDAA Compliant

Camera Module																
Image sensor	1/2.7" progressive scan CMOS with BSI and NIR+ technology															
Mini. Illumination	Color: 0.01 Lux @ (F1.6, AGC ON); B/W: 0.002Lux @ (F1.6, AGC ON); 0Lux with IR															
Image setting	Flip, Mirror, Saturation, Brightness, Contrast, Sharpness, AGC, and AWB adjusted by client															
Shutter Speed	50Hz: 1/25s~1/25,000s, 60Hz: 1/30s~1/30,000s															
White Balance	Auto/Manual/Indoor/Outdoor															
Gain	Auto/Manual															
Day & Night	Auto/Manual															
Aperture control	N/A															
S/N Ratio	>52dB															
3D DNR	Auto/Manual															
AE Enhancement	BLC, HLC, WDR															
Privacy Mask	4 Programmable privacy masks, up to 8 per request															
Picture overlay	Logo picture could be overlaid on video with 128x128pixels, 24bits BMP format															
Font overlay	Max 15characters per line, 8lines max, white color or red color															
Lens																
Focus length	f=2.8-12mm lens, 4x optical															
Zoom Speed	About 1.6second(Wide->tele)															
Field of View	Horizontal: 97° to 31±5%; Vertical: 51° to 18±5%; Diagonal: 115° to 36±5% (wide-tele)															
Working distance	wide: 0.3m ~ INF; tele: 0.5m ~ INF															
Aperture Range	F1.6~ F2.7 (wide-tele)															
IRCut filter	Electrical switchable ICR															
DORI table	<table border="1"> <thead> <tr> <th>Lens</th> <th>Detect(25px/m)</th> <th>Observe(63px/m)</th> <th>Recognize(125px/m)</th> <th>Identify(250px/m)</th> </tr> </thead> <tbody> <tr> <td>2.8mm</td> <td>223 ft (68m)</td> <td>88.9 ft (27.1m)</td> <td>44.6 ft (13.6m)</td> <td>22.3 ft (6.8m)</td> </tr> <tr> <td>12mm</td> <td>678.1 ft (206.7m)</td> <td>269 ft (82m)</td> <td>135.5 ft (41.3m)</td> <td>68 ft (20.7m)</td> </tr> </tbody> </table>	Lens	Detect(25px/m)	Observe(63px/m)	Recognize(125px/m)	Identify(250px/m)	2.8mm	223 ft (68m)	88.9 ft (27.1m)	44.6 ft (13.6m)	22.3 ft (6.8m)	12mm	678.1 ft (206.7m)	269 ft (82m)	135.5 ft (41.3m)	68 ft (20.7m)
Lens	Detect(25px/m)	Observe(63px/m)	Recognize(125px/m)	Identify(250px/m)												
2.8mm	223 ft (68m)	88.9 ft (27.1m)	44.6 ft (13.6m)	22.3 ft (6.8m)												
12mm	678.1 ft (206.7m)	269 ft (82m)	135.5 ft (41.3m)	68 ft (20.7m)												
PTZ																
Pan Range	0~355°															
Pan speed	Configurable, from 0.1~80°/s; Preset speed: 80°/s															
Tilt Range	From -5° to 90°															
Tilt Speed	Configurable, from 0.1~ 60°/s, Preset speed: 60°/s															
Pan/Tilt action																
Intervals	At least 10seconds, adjustable															
Proportional Zoom	Yes															
Preset	300															
Cruise	8 cruises, up to 16 presets for each cruises															
Trace	4 traces, record time over 3 minutes for each trace															
Power off memory	Support															
Action mode	Preset/Cruise/Trace/Auto Scan/Random Scan															
3D Positioning	Support															
PTZ Position Display	Support															
Schedule Task	Preset/Cruise/Trace/Random Scan/Boundary Scanning /Dome reboot															
Supplement Light																
IR Distance	Up to 164 ft (50m), 4pcs of IR Array into 2 Groups, auto switch with zoom ratio															
Smart IR	Yes															
White light Distance	Up to 98ft , 2pcs of White LED Array (Deterrent Only)															
White light Mode	Flash mode(2x brightness), time interval adjustable; Constant Mode ( On AI Events)															
Network																
Max Resolution	2560x1440															
Main stream	25fps (2560x1440, 2048x1536, 1920x1080, 1280x960, 1280x720); 30fps (2560x1440, 2048x1536, 1920x 1080, 1280x 960, 1280x 720)															
Sub stream	25fps (704 x 576, 640 x 480, 352 x 288); 30fps (704 x 480, 640 x 480, 352 x 240)															
Third Stream	25fps (1280 x 720, 704 x 576, 640 x 480, 352 x 288); 30fps (1280 x 720, 704 x 480, 640 x 480, 352 x 240)															
Video compression	Smart H.265+/H.265/H.264+/H.264/MJPEG															
H.264 Encoder	H.264/AVC codec BP/MP/HP, level 5.1															
H.265 Encoder	H.265/HEVC codec MP, level 5.0															
Video bit rate	64Kbps ~ 16Mbps															

Audio Compression	G.711 A/U
Audio bit rate	64Kbps
Protocols	HTTP, HTTPS, IPv4/IPv6, 802.1x, QoS, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTP, TCP/IP, UDP, IGMP, ICMP, DHCP, PPPoE
User / Host	Up to 16 users, 3 levels: Administrator, Advanced User and Normal User
Security Measures	User authentication (ID and PW), Host authentication (MAC address); HTTPS encryption, IEEE802.1x port-based network access control; IP address filtering
Smart Features	
Basic event	Motion detection, video tampering alarm, exception (network disconnected, IP address conflict, SD full, SD error)
Face recognize	Support human face detection, max 15 human faces per scene, Support face capture, tracking, comparison, edge storage
Road traffic	Vehicle detecting and tracking, etc.
Smart Detection	Tripwire, Bi-directional tripwire, Illegal intrusion detection, Region entrance detection, Region exiting detection, etc. ( Human and Vehicle Classification)
Smart Tracking	Smart tracking of human or vehicle, auto/manual
Active Deterrence	Flash strong white light and predefined voice upon invaders detected. Support 10 more different predefined voice clips
Dual way talk	Alarm Deterrent + Two Way Audio
System Integration	
Ext. Audio Interface	1-ch audio input(mic in), 2.0-2.4Vp-p, 1kΩ±10%; 1-ch audio output(line out), line level, impedance: 600 Ω;
Built-in Speaker	Yes
Built-in Speaker Info	Power/output: 1W, dB: ≥90dB, Frequency: 100-4KHz
Built-in MIC	1channel, rotation with camera lens direction, up to 15 ft distance voice recordable.
Audio device switch	Default use built-in speaker and MIC, manually switch to external
Alarm Linkage	Alarm actions, such as Preset, Cruise, Trace, Memory Card Video Record, Trigger Recording, Notify Surveillance Center, Upload to FTP/Memory Card, Send Email, etc
Network Interface	1 RJ45 10M/100M Adaptive Ethernet (Support PoE+)
Storage Slot	Standalone ext. memory card chamber, support microSD/TF card, up to 256GB
Serial interface	N/A (RS485/232)
Auxiliary video out	N/A(BNC/CVBS/TVI)
Reset button	Yes
Heat and Fan	Built-in temperature sensor, auto shut down at over-temperature; auto heat at cold start. No built-in fan.
Water removal	Dust and Water-resistant coating for lens cover
API	ONVIF, support SDK and third-party management platform
Client	Paramont NVR, Paramont CMS, free iOS and Android App
Web Browser	IE8-11
App version	Default: 5.0.1. Update to 5.11 per request
Audio Sensitivity	-36db
General	
Languages	Czech; English, German; Hungarian ; Italian ; Japanese ; Korean ; Portuguese, Polish; Russian, Romanian, Spanish; Spanish(Mexico); Simplified Chinese; Turkish; Traditional Chinese. etc.
Power	DC12V±20%; 3000mA, PoE+ (802.3.at), AVG. 4.5Watt, Max 16.2Watt at day; 20.2Watt at night (LED on, Speaker on + PT Rotation)
Working condition	-40°F ~ 158°F (-40°C ~ 70°C) IR off, -40°F ~ 140°F (-40°C ~ 60°C) IR on; Cold start> 25°C(1Hour waiting), ≤90%RH
Storage condition	-40°F ~ 158°F (-40°C ~ 70°C) ; ≤ 95% RH
Protection	6000V Lightning Protection, Surge Protection and Voltage Transient Protection
Shield Material	Main body: Aluminum Alloy(ADC12), Decoration: Polymer(Glass fiber and Plastic)
Dimensions	5.1 x 6.4" (130 x 162 mm)
Net Weight	Approx. 2.65lb (1.2Kg)
Certification	IP66, IK10 (include lens window), ROHS, CE, FC, 3C

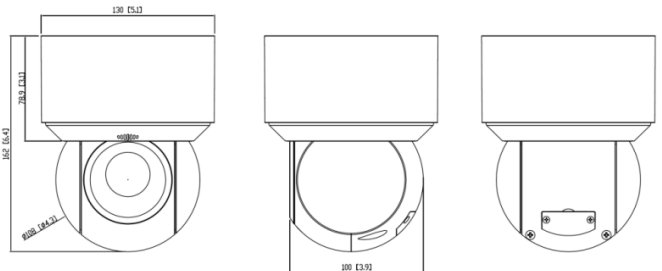

### Ordering Information

**PAR-P4PTZXIR2812NH-AIWL:** 4 Megapixel PTZ, 2.8-12mm Motorized A/F

**PAR-P4PTZXIR2812BNH-AIWL:** 4 Megapixel PTZ, 2.8-12mm Motorized A/F (Black Housing)

InVid Tech, reserves the right to make changes to improve our products at any time without notice; we are not responsible for misprints.