



**M8**

## INDUSTRIAL I/O CABLES

PART NUMBER REFERENCE: **M8 - XX - X - XX - XX M**

### Select Connector Type: End "1" (See Next Pg.)

M8, 2P Female = A	M8, 5P Female = G
M8, 2P Male = B	M8, 5P Male = H
M8, 3P Female = C	M8, 6P Female = J
M8, 3P Male = D	M8, 6P Male = K
M8, 4P Female = E	M8, 8P Female = L
M8, 4P Male = F	M8, 8P Male = M

### Select Connector Orientation: End "1" Straight Exit = A

Right Angle: B = 360°, C = 145°, D = 90°, E = 135°, F = 180°, G = 225°, H = 270°, J = 315°

### Cable Type Options:

28 AWG, 5C = 1
22 AWG, 5C, HIFLEX = 2
26 AWG, 5C HIFLEX = 3
28 AWG, 8C = 4

### Select Connector Type: End "2" (See Next Pg.)

M8, 2P Female = A	M8, 5P Female = G
M8, 2P Male = B	M8, 5P Male = H
M8, 3P Female = C	M8, 6P Female = J
M8, 3P Male = D	M8, 6P Male = K
M8, 4P Female = E	M8, 8P Female = L
M8, 4P Male = F	M8, 8P Male = M

X on end "2" denotes Flying Leads = X

### Select Connector Orientation: End "2" Straight Exit = A

Right Angle: B = 360°, C = 145°, D = 90°, E = 135°, F = 180°, G = 225°, H = 270°, J = 315°

### Length in Meters: **0.3 – 60**

# CONNECTOR TYPES: M8

**A**



M8, 2P Female

**B**



M8, 2P Male

**C**



M8, 3P Female

**D**



M8, 3P Male

**E**




M8, 4P Female

**F**



M8, 4P Male

**G**



M8, 5P Female

**H**



M8, 5P Male

**J**



M8, 6P Female

**K**



M8, 6P Male

**L**




M8, 8P Female

**M**



M8, 8P Male

**X**

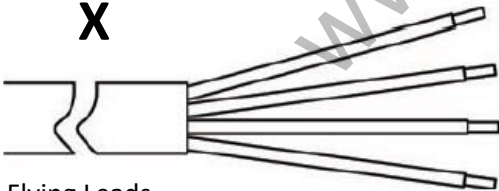

Flying Leads  
( Approximate 50 mm. Cut-Back )



Temp: 02-28-22