


① IRIS CABLE

(+) RED	INPUT	VOLTAGE
(-) BLACK	GROUND	
WHITE	VIDEO SIGNAL	
GREEN	REMOTE CONTROL	

② MOTOR CABLE

(+) GREEN	FOCUS NEAR
(+) BLACK	FOCUS FAR
(+) YELLOW	ZOOM IN
(+) RED	ZOOM OUT

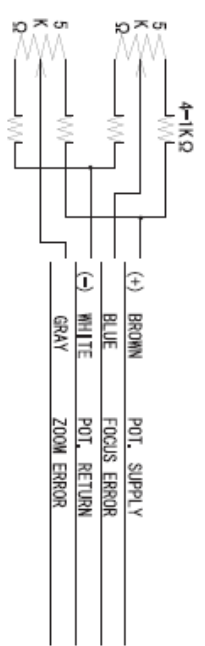


SPECIFICATION

1. USE	FOR 1/2" COLOR B/W CAMERA
2. FOCAL LENGTH	f = 8 ~ 120 mm
3. IRIS RANGE	F = 1.8 ~ 360
4. IMAGE SIZE	φ 8 (4.8x6.4)
5. BACK FOCAL LENGTH	14.66 mm in air
6. FLANGE FOCAL LENGTH	17.526 mm in air
7. FOCUS RANGE	∞ ~ 1.2 m
8. FIELD ANGLE	DIA. 53.6° (T) HOR. 43.6° VER. 33.0°
9. FIELD OF VIEW AT K.O.S.	DIA. 1133.6 mm HOR. 903.4 mm VER. 626.6 mm
10. DISTORTION	-0.9% %
11. LENS CONSTRUCTION	13 GROUPS, 16 ELEMENTS
12. CLEAR APERTURE	FRONT φ46 REAR φ14.2
13. EXIT PUPIL POSITION	-83.4 mm (format)
14. WEIGHT	550 g (570 g)

DC (DIRECT CONTROL)

DRIVE COIL	RESISTOR	190 Ω	(0° φ)
BRAKE COIL	RESISTOR	1150 Ω	(0° φ)
DRIVE VOLT.	OPEN	LESS THAN 4V	2φ in 1φ in
	CLOSE	OVER THAN 0V	1φ in
		W/O SPRING	

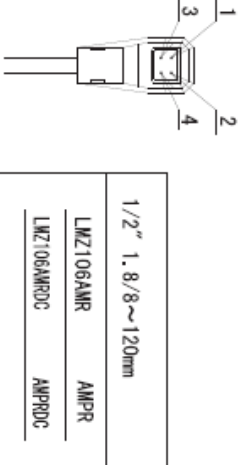

1/2" 1.8/8~120mm

LMZ106AMR AMPR

LMZ106AMRDC AMPRDC