


1' -32 UNF

① IRIS CABLE

(+)	RED	INPUT	VOLTAGE
(-)	BLACK	GROUND	
	WHITE	VIDEO SIGNAL	
	GREEN	LEVEL REMOTE CONTROL	

② MOTOR CABLE

(+)	GREEN	FOCUS NEAR
(+)	BLACK	FOCUS FAR
(+)	YELLOW	ZOOM IN
(+)	RED	ZOOM OUT

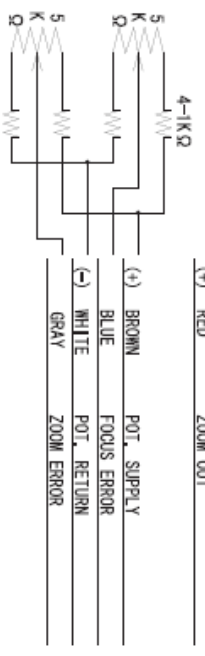

SPECIFICATION

1.	USE	FOR 1/2" COLOR, B/W CAMERA	
2.	FOCAL LENGTH	f= 10 ~ 250 mm	
3.	IRIS MAX APERTURE	F= W1.5 T2.2	
4.	IRIS RANGE	F=1.5~ 125	
5.	IMAGE SIZE	φ 8 (6.4x4.8)	
6.	BACK FOCAL LENGTH	12.93 mm in air	
7.	FLANGE FOCAL LENGTH	17.526 mm in air	
8.	FOCUS RANGE	∞ ~ 2.5 m	
9.	FIELD ANGLE	DIA.	(W) 43.7 ° (T) 1.86 °
		HOR.	35.3 °
9.	FIELD OF VIEW AT 1.0x	VER.	26.7 °
		HOR.	1.12 °
10.	FIELD OF VIEW AT 1.0x	DIA.	1427 mm
		HOR.	59.9 mm
10.	EXIT PUPIL POSITION	HOR.	1143 mm
		VER.	48.1 mm
11.	DISTORTION	TV	857 mm
		FRONT	-0.1 %
12.	CLEAR APERTURE	FRONT	φ 108
		REAR	φ 14.3
13.	EXIT PUPIL POSITION	-175 mm (format)	
14.	WEIGHT	2.3kg	

1/2" F1.5/10-250mm

LMZ250AM

LMZ250AMP