


1" 0.85/25mm CS		2/3"	1/2"
FOCAL LENGTH	f=25mm		
MAX. DIAMETER (RATIO)	F=1:0.85		
PICTURE SIZE	9.6×12.8mm	6.6×8.8	4.8×6.4
ANGLE	VER. ANGLE	21.9°	15.1°
	HOR. ANGLE	29.0°	20.0°
	DIA. ANGLE	35.9°	25.0°
DISTORTION (TV)	-0.5%	-0.3%	-0.2%
MINIMUM FOCUS DISTANCE	3m		
FLANGE BACK	12.5 mm in air		
BACK FOCUS	23mm in air		
FILTER SCREW SIZE	M77×0.75		
FRONT/REAR EFFECTIVE DIA.	前φ52.5mm	後φ30.0mm	
MOUNT	CS-MOUNT		
EXIT PUPIL	58.6mm		
TEMPERATURE RANGE	-10~+50°C		
STORAGE TEMPERATURE RANGE	-20~+60°C		
RESOLUTION CENTER/CORNER	中心120本/mm	周辺100本/mm	
WEIGHT	g		

DC (DIRECT CONTROL)

DRIVE COIL	RESISTOR COLOR	190Ω (20°C)
	RED(+)	3pin
	BLACK	4pin
BRAKE COIL	RESISTOR COLOR	1150Ω (20°C)
	YELLOW(+)	2pin
	GREEN	1pin
DRIVE VOLT.	OPEN	LESS THAN +4V
	CLOSE	OVER THAN 0V W/CLOSING SPRING

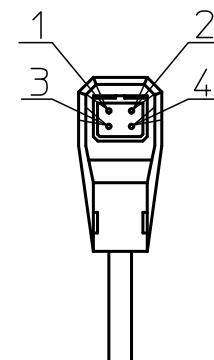

尺度	1/1	承認	八木	製図	八木
機種名	25mm F0.85 1inch				
機種番	LM25JS5MA 外觀図				
2014.3.31	作成年月日				